



GE
Lighting

33774 - GE garage & basement circline 22 watt T9 circline 1-pack

FC8T9/CW

- ☞ 1.1 inch diameter T9 circline with 4-pin (g10q) base
- ☞ 4100K cool white light appearance
- ☞ Cool white light perfect for sizable spaces
- ☞ For use in large spaces such as basements and garages
- ☞ GE garage & basement circline fluorescent bulbs' cool white light is perfect for illuminating sizable spaces throughout your home. Use in large open spaces in your home including finished and unfinished basements, garages and rec rooms
- ☞ Lasts 5.5 years based on 6 hours per day usage

Product Photo



GENERAL CHARACTERISTICS

Base Description	4-Pin
Base Type	Pin/Plug-In
Mercury Content	7 mg
Mercury-Picogram per mean lm hr	707.1
Starting Temp (MIN) C-degrees	10 °C
Bulb Material	Lead glass
Rated Life Hours-nominal	12000 h
Primary Application	Full Wattage Garage & Basement Linear Fluorescent
Product Technology	G10q
Base	T9
Bulb Shape	

PHOTOMETRIC CHARACTERISTICS

Mean Lumens nominal	825 lm
Nominal Initial Lumen per Watt	50
Initial Lumens-nominal	1100 lm
Color Rendering Index-CRI	60
Color Temperature	4100 K

PRODUCT INFORMATION

Product Code	33774
Description	FC8T9/CW
Alternative Unit Of Measure	CASE
Standard Package Quantity	
Ean UPC	043168980388
Standard Package GTIN	00043168337748
No Of Items Per Sales Unit	
No Of Items Per Standard Package	
Sales Unit	Case
UCC	043168337748
Alternative Unit Of Measure	EACH
Standard Package Quantity	12
Ean UPC	043168980388
Standard Package GTIN	00043168980388
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
Sales Unit	Each
UCC	043168337748

DIMENSIONS

Bulb Diameter (DIA) <Max>	1.22 in
Bulb Diameter (DIA) <Min>	1.03 in
Diameter	1.12 in
Nominal Length	8.25 in

ELECTRICAL CHARACTERISTICS

Current Crest Factor (MAX)	1.7
Cathode Resistance Ratio - Rh/Rc (MIN)	4.250
Cathode Resistance Ratio - Rh/Rc (MAX)	6.500
Rated power (Watts)	22 W



CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
- Wear safety glasses and gloves when handling lamp.
- Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
- Turn power off before inspection
- installation or removal.

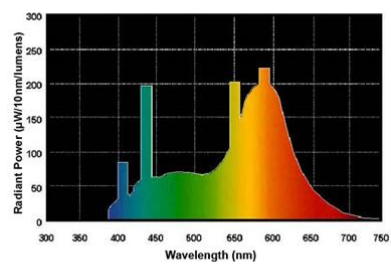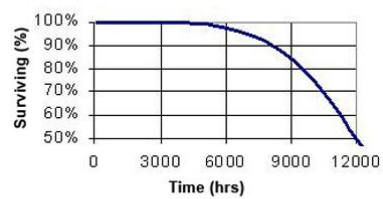

Sep 21, 2018 5:53:32 PM For additional information, visit www.gelighting.com