## SIEMENS

## Data sheet

## 3SU1400-1AA10-1BA0

CONTACT MODULE WITH 1 CONTACT ELEMENT, 1NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING



Figure similar

product brand name	SIRIUS ACT		
Product designation	Commanding and signaling devices		
Design of the product	Contact module		
Contact block/ lampholder:			
Suitability for integration			
<ul> <li>pressure selection button</li> </ul>	Yes		
<ul> <li>front element</li> </ul>	Yes		
<ul> <li>Pendant pushbutton</li> </ul>	Yes		
<ul> <li>Pendant switch</li> </ul>	Yes		
General technical data:			
Product function			
<ul> <li>positive opening</li> </ul>	No		
Insulation voltage			
<ul> <li>Rated value</li> </ul>	500 V		
Surge voltage resistance Rated value	6 kV		
Protection class IP			
• of the enclosure	IP40		
• of the terminal	IP20		

Degree of pollution	3
Shock resistance	
• acc. to IEC 60068-2-27	Sinusoidal half-wave 50 g / 11 ms
<ul> <li>for railway applications acc. to DIN EN 61373</li> </ul>	Category 1, Class B
Vibration resistance	
• acc. to IEC 60068-2-6	10 500 Hz: 5g
<ul> <li>for railway applications acc. to DIN EN 61373</li> </ul>	Category 1, Class B
Operating frequency maximum	3 600 1/h
Mechanical service life (switching cycles)	
• typical	10 000 000
Electrical endurance (switching cycles)	
• typical	10 000 000
Thermal current	10 A
Equipment marking	
• acc. to DIN EN 61346-2	S
• acc. to DIN EN 81346-2	S
Design of the fuse link for short-circuit protection of	gG / Dz 10 A, quick-acting / Dz 10 A
the auxiliary switch with type of assignment 1	
required	
Continuous current of the C characteristic MCB	10 A
Power Electronics:	
Contact reliability	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA)
Contact reliability	
Contact reliability Auxiliary circuit:	per 10 million (5 V, 1 mA)
Contact reliability	
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts Number of NC contacts	per 10 million (5 V, 1 mA)
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts	per 10 million (5 V, 1 mA) Silver alloy
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts Number of NC contacts • for auxiliary contacts Number of NO contacts	per 10 million (5 V, 1 mA) Silver alloy
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts Number of NC contacts • for auxiliary contacts Number of NO contacts • for auxiliary contacts • for auxiliary contacts	per 10 million (5 V, 1 mA) Silver alloy 0
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts Number of NC contacts • for auxiliary contacts Number of NO contacts	per 10 million (5 V, 1 mA) Silver alloy 0 1
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts Number of NC contacts • for auxiliary contacts Number of NO contacts • for auxiliary contacts - leading contact Number of CO contacts	per 10 million (5 V, 1 mA) Silver alloy 0 1
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts Number of NC contacts • for auxiliary contacts • for auxiliary contacts • for auxiliary contacts - leading contact Number of CO contacts • for auxiliary contacts • for auxiliary contacts • for auxiliary contacts	per 10 million (5 V, 1 mA) Silver alloy 0 1 0
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts Number of NC contacts • for auxiliary contacts Number of NO contacts • for auxiliary contacts - leading contact Number of CO contacts	per 10 million (5 V, 1 mA) Silver alloy 0 1 0
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts Number of NC contacts • for auxiliary contacts • for auxiliary contacts • for auxiliary contacts - leading contact Number of CO contacts • for auxiliary contacts • for auxiliary contacts Operating current at AC-12	per 10 million (5 V, 1 mA) Silver alloy 0 1 0 0
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts Number of NC contacts • for auxiliary contacts • for auxiliary contacts leading contact Number of CO contacts • for auxiliary conta	per 10 million (5 V, 1 mA) Silver alloy 0 1 0 0 0 10 A
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts Number of NC contacts • for auxiliary contacts • for auxiliary contacts • for auxiliary contacts - leading contact Number of CO contacts • for auxiliary contac	per 10 million (5 V, 1 mA) Silver alloy 0 1 1 0 0 10 A 10 A
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts Number of NC contacts • for auxiliary contacts • for auxiliary contacts • for auxiliary contacts - leading contact Number of CO contacts • for auxiliary contac	per 10 million (5 V, 1 mA) Silver alloy 0 1 1 0 0 10 A 10 A 10 A 10 A 10 A 8 A
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts Number of NC contacts • for auxiliary contacts • for auxiliary contacts - leading contact Number of CO contacts • for auxiliary contac	per 10 million (5 V, 1 mA) Silver alloy 0 1 1 0 0 10 A 10 A 10 A 10 A
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts Number of NC contacts • for auxiliary contacts • for auxili	per 10 million (5 V, 1 mA) Silver alloy 0 1 0 0 10 A 10 A 10 A 10 A 8 A 8 A
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts Number of NC contacts • for auxiliary contacts • for auxiliary contacts • for auxiliary contacts leading contact Number of CO contacts • for auxiliary conta	per 10 million (5 V, 1 mA)         Silver alloy         0         1         0         0         0         0         10 A         10 A         10 A         8 A         8 A         8 A         6 A
Contact reliability Auxiliary circuit: Design of the contact of the auxiliary contacts Number of NC contacts • for auxiliary contacts • for auxili	per 10 million (5 V, 1 mA) Silver alloy 0 1 0 0 10 A 10 A 10 A 10 A 8 A 8 A

• at 230 V Rated value	6 A	
• at 400 V Rated value	3 A	
● at 500 V Rated value	1.4 A	
Operating current at DC-12		
<ul> <li>at 24 V Rated value</li> </ul>	10 A	
• at 48 V Rated value	5 A	
• at 110 V Rated value	2.5 A	
• at 230 V Rated value	1 A	
• at 400 V Rated value	0.3 A	
• at 500 V Rated value	0.3 A	
Operating current at DC-13		
• at 24 V Rated value	3 A	
• at 48 V Rated value	1.5 A	
• at 110 V Rated value	0.7 A	
• at 230 V Rated value	0.3 A	
• at 400 V Rated value	0.1 A	
• at 500 V Rated value	0.1 A	
Connections/ Terminals:		
Type of electrical connection	screw-type terminals	
Tightening torque		
<ul> <li>with screw-type terminals</li> </ul>	0.8 0.9 N·m	
Ambient conditions:		
Ambient temperature		
<ul> <li>during operation</li> </ul>	-25 +70 °C	
during storage	-40 +80 °C	
Environmental category during operation acc. to IEC 60721	3K6, 3C3, 3S2, 3M6	
Installation/ mounting/ dimensions:		
Mounting type		
<ul> <li>of modules and accessories</li> </ul>	Front plate mounting	
Height	33.2 mm	
Width	9.8 mm	
Depth	27.7 mm	
Certificates/ approvals:		

For use in hazardous	Declaration of	other
locations	Conformity	
Herstellererklärung		Bestätigungen
	CE	
	EG-Konf.	

urther information

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs


Industry Mall (Online ordering system) http://www.siemens.com/industrymall


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU14001AA101BA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3SU14001AA101BA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3SU14001AA101BA0&lang=en

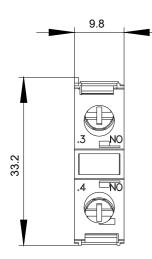

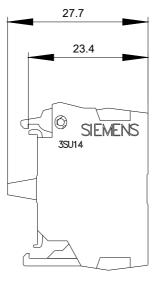

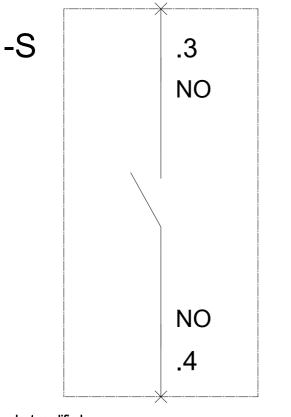

last modified:

13.08.2015