6" Recessed Housing - BL9ICN New Construction Insulated Ceiling

Project:	
Туре:	
Catalog #:	



BES

STANDARD



APPLICATIONS

For new construction applications, where the fixture will be in direct contact with insulation.

ILLUMINATION

- Max 75-watt BR/PAR30 incandescent lamp.
- Adjustable lamp height.

ELECTRICAL

- Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.
- Optional quick connect for easy wiring and installation.

MOUNTING

- Integral T-bar installation slots.
- Listed for through branch circuit wiring.
- Pre-installed Real nail easily installs in regular lumber, engineered lumber.
- Housing adjusts from 5/3"-13/3" to accommodate various ceiling thickness.
- Bar hangers are adjustable from 13%" to 25" and can be repositioned 90° on frame.

ORDERING INFORMATION


HOUSING

- Galvanized steel construction. The housing can be removed from frame to provide access to the junction box.
- Contains six ⁷/₈" knockouts, one 1¹/₈" knockout and four Romex plyouts with strain relief.

WARRANTY/LISTING

- Five year warranty on all electronics and housing.
- cULus Listed for Damp Location.
- cULus listed for feed-through wiring.
- Certified under ASTM-E283 for Airtight construction.

DIMENSIONS

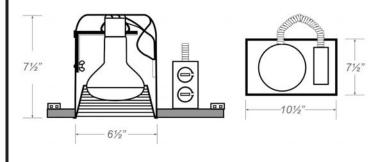


Sample Part Number: BL9ICN-AT-N

Model	Construction	Mounting Options
BL9ICN	AT Airtight (Standard)	N With Nail QN Quick Connect (with nai

6" Recessed Trims Compatible with BL9ICN

BEST LIGHTING PRODUCTS

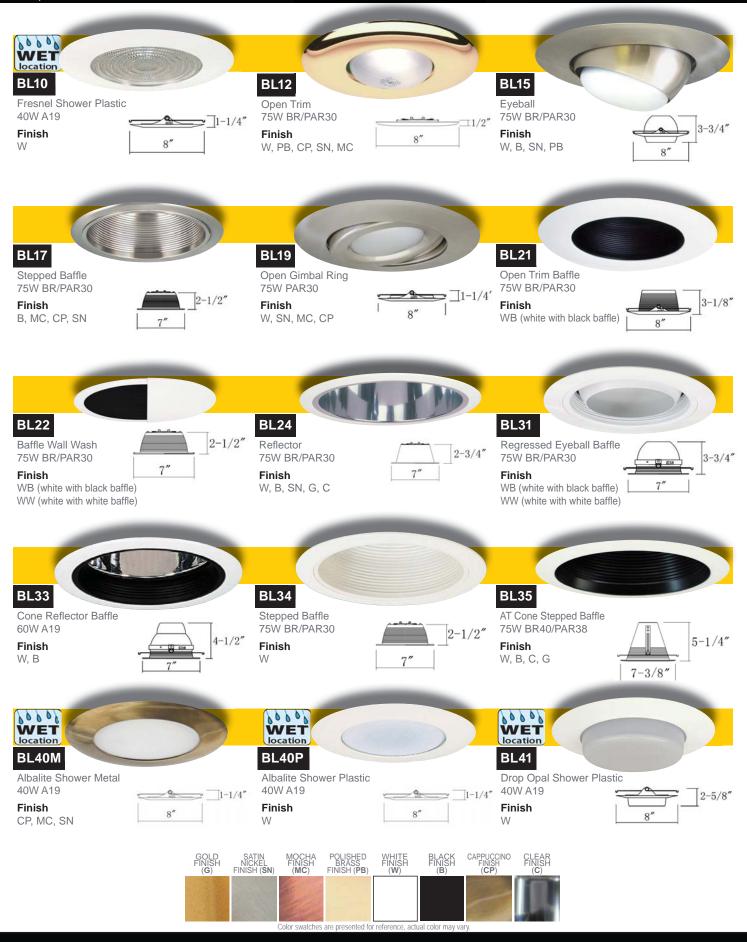

BEST LIGHTING PRODUCTS • 1213 ETNA PARKWAY, PATASKALA OH 43062 • 740-964-1198 • www.bestlighting.net Specifications and dimensions subject to change without notice.