


Molded Case Circuit Breakers

BQD 100A Frame Panelboard Mounting Circuit Breakers

Selection/Dimensions

BQD^④

Continuous Current Rating @ 40°C	1-Pole		2-Pole ^⑤		3-Pole ^⑤	
	277V AC–125V DC		480Y/277V AC–125/250V DC		480Y/277V AC	
	Catalog Number	List Price \$	Catalog Number	List Price \$	Catalog Number	List Price \$
15	BQD115 ^{①②}	128.00	BQD215 ^⑤	289.00	BQD315 ^⑤	513.00
20	BQD120 ^{①②}	128.00	BQD220 ^⑤	289.00	BQD320 ^⑤	513.00
25	BQD125 ^②	128.00	BQD225 ^⑤	289.00	BQD325 ^⑤	513.00
30	BQD130 ^②	128.00	BQD230 ^⑤	289.00	BQD330 ^⑤	513.00
35	BQD135 ^②	128.00	BQD235 ^⑤	289.00	BQD335 ^⑤	513.00
40	BQD140 ^②	128.00	BQD240 ^⑤	289.00	BQD340 ^⑤	513.00
45	BQD145 ^{②▲}	128.00	BQD245 ^⑤	289.00	BQD345 ^⑤	513.00
50	BQD150 ^②	128.00	BQD250 ^⑤	289.00	BQD350 ^⑤	513.00
60	BQD160	128.00	BQD260	289.00	BQD360	513.00
70	BQD170■	247.00	BQD270	588.00	BQD370	699.00
80	BQD180■	247.00	BQD280	588.00	BQD380	699.00
90	BQD190■	247.00	BQD290	588.00	BQD390	699.00
100	BQD1100■	247.00	BQD2100	588.00	BQD3100	699.00

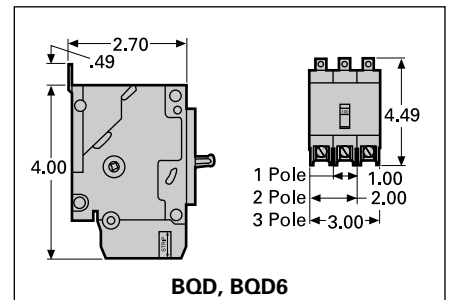

BQD6 CSA Certified

Continuous Current Rating @ 40°C	1-Pole		2-Pole ^⑤		3-Pole ^⑤	
	347V AC		600/347V AC		600/347V AC	
	Catalog Number	List Price \$	Catalog Number	List Price \$	Catalog Number	List Price \$
15	BQD6115 ^①	128.00	BQD6215	289.00	BQD6315	513.00
20	BQD6120 ^①	128.00	BQD6220	289.00	BQD6320	513.00
25	BQD6125■	128.00	BQD6225■	289.00	BQD6325■	513.00
30	BQD6130	128.00	BQD6230	289.00	BQD6330	513.00
35	BQD6135■	128.00	BQD6235■	289.00	BQD6335■	513.00
40	BQD6140■	128.00	BQD6240■	289.00	BQD6340	513.00
45	BQD6145■	128.00	BQD6245■	289.00	BQD6345■	513.00
50	BQD6150■	128.00	BQD6250■	289.00	BQD6350	513.00
60	BQD6160■	128.00	BQD6260■	289.00	BQD6360	513.00
70	BQD6170■	247.00	BQD6270■	588.00	BQD6370	699.00

Shipping Weights

Number of Poles	Number per Carton	Shipping Weight (lbs.) (ea.)
1	1/12/48	.6
2	1/6/24	1.2
3	1/4/16	2.0

Interrupting Ratings

Breaker Type	Number of Poles	RMS Symmetrical Amperes (KA)								
		Volts AC						Volts DC		
		120	240	277	480/277	347	600/347	125	125/250	
BQD (UL)	1	65	—	14	—	—	—	—	14	—
	2	—	65	—	14	—	—	—	—	14
	3	—	65	—	14	—	—	—	—	—
BQD6 (CSA)	1	65	—	—	—	10	—	—	14	—
	2	—	65	—	—	—	10	—	—	14
	3	—	65	—	—	—	10	—	—	—

Lugs For 60/75°C Wire

BQD – Load End Only	
15–40	#14–#6 AWG Cu #12–#6 AWG Al
45–100	#8–#1 AWG Cu #6–#1/0 AWG Al

For inches / millimeters conversion, see Application Data section.
■ Built to order. Allow 2–3 weeks for delivery.
▲ Built to order. Allow 6–8 weeks for delivery.

④ SWD rated for switching fluorescent lighting.
⑤ HID rated at 277V AC.
⑥ Not suitable for 3-phase delta 480V applications.
⑦ HACR rated.

⑧ HID rated at 480Y/277V AC.