

Contactor, 42DP,40A,2P,Open,24V Contactor,
42DP,40A,2P,Open,24V



Product brand name	Class 42 DP Contactors
Design of the product	Non-reversing Definite Purpose Contactor
Special product feature	Snap on auxiliary contacts, enclosed body design

General technical data

Weight [lb]	1.03 lb
Height x Width x Depth [in]	3.69 × 2.38 × 2.87 in
Protection against electrical shock	Not finger-safe
Ambient temperature [°F]	
<ul style="list-style-type: none"> during storage maximum during operation maximum 	158 °F 158 °F
Ambient temperature	
<ul style="list-style-type: none"> during storage maximum during operation maximum 	75 °C 70 °C
Country of origin	China
Number of poles for main current circuit	2

Contactor

Size of contactor	40A
Number of NO contacts for main contacts	2

Operating voltage for main current circuit at AC at 60 Hz maximum	600 V
Operating current at AC at 600 V rated value	160 A
Mechanical service life (switching cycles) of the main contacts typical	250000

Auxiliary contact

Number of NC contacts for auxiliary contacts	4
Number of NO contacts for auxiliary contacts	4
Number of NC contacts at contactor for auxiliary contacts	0
Number of NO contacts at contactor for auxiliary contacts	0
Number of total auxiliary contacts maximum	4
Operating current of auxiliary contacts of contactor <ul style="list-style-type: none"> • at AC at 600 V 	10 A
Contact rating of auxiliary contacts of contactor according to UL	10A@600VAC (A600), 11A 1/2HP 125-250VAC, 0.6A 125VDC, 0.3A 250VDC

Coil

Control supply voltage <ul style="list-style-type: none"> • at AC at 50 Hz rated value • at AC at 60 Hz rated value 	24 V 24 V
---	--------------

Enclosure

Degree of protection NEMA rating of the enclosure	Open device (no enclosure)
---	----------------------------

Mounting/wiring

Mounting position	vertical
Mounting type	Surface mounting and installation
Type of electrical connection for supply voltage line-side	Box lug
Tightening torque [lbf-in] for supply	25 ... 25 lbf-in
Type of connectable conductor cross-sections at line-side at AWG conductors single or multi-stranded	4 AWG
Type of electrical connection for load-side outgoing feeder	Box lug
Type of connectable conductor cross-sections at AWG conductors for load-side outgoing feeder single or multi-stranded	4 AWG
Type of electrical connection of magnet coil	Quick connects, Screw-type terminals
Type of electrical connection for auxiliary and control current circuit	Quick Connects, Screw-type terminals
Type of electrical connection at contactor for auxiliary contacts	Screw-type terminals

Certificates/approvals

Certificate of suitability	cRUus, ARI 780 & 790, UL File E14900
----------------------------	--------------------------------------

Further information

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:42CF15AJ>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/US/en/ps/US2:42CF15AJ>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:42CF15AJ&lang=en

Certificates/approvals

<https://support.industry.siemens.com/cs/US/en/ps/US2:42CF15AJ/certificate>

30-40A 2 & 3 Pole Pole

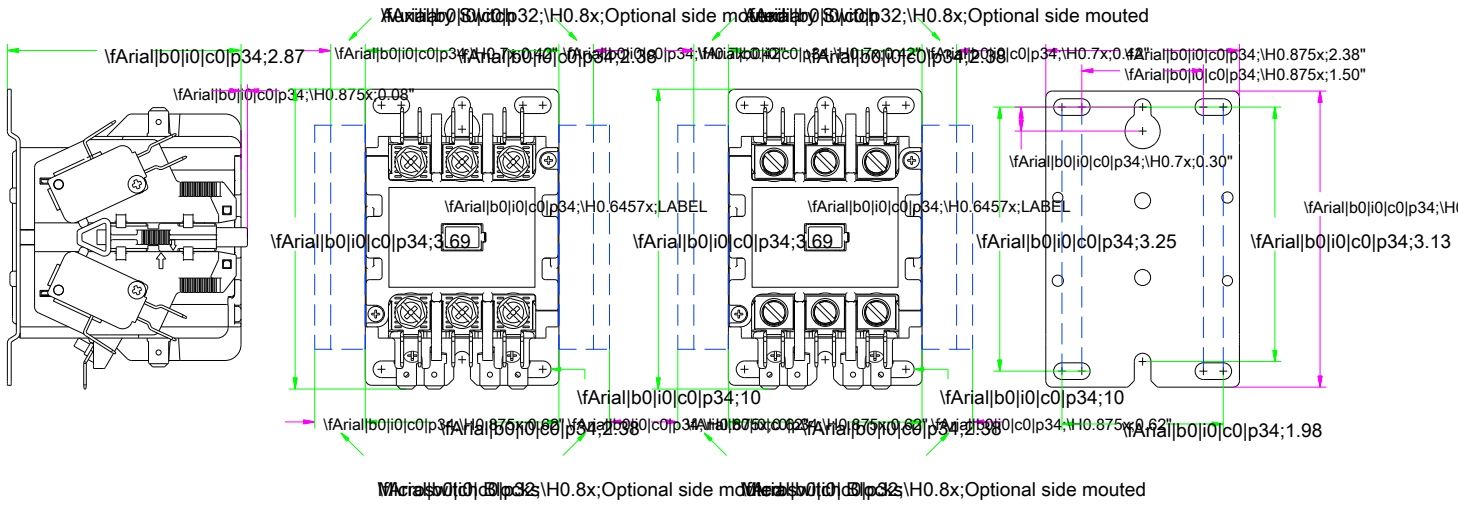

last modified:

11/15/2019