
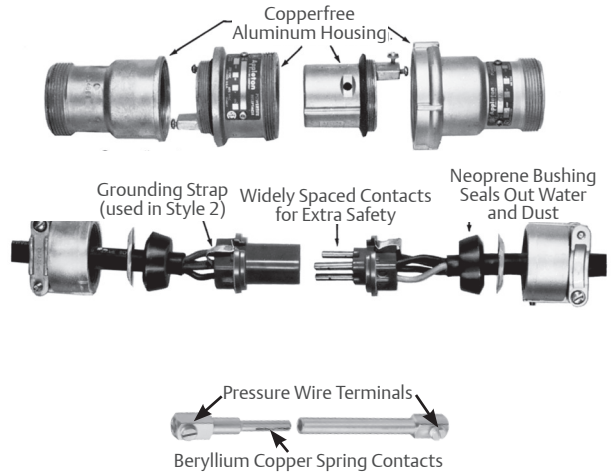


1. Grounding strap in Style 2 receptacle from extra pole to receptacle housing.
2. Screw locks receptacle housing and interior into an assembly and permits easy field conversion to reverse service for 30, 60, 100, 150, and 200 Amp.
3. Receptacle interior retaining washers.
4. Raintight mounting box gasket.
5. Grounding detent springs in Style 1 and Style 2.
6. Longer ground terminal in Style 2 receptacle "makes first, breaks last."
7. Floating-type plug terminal self-aligns to receptacle contacts.
8. Screw locks plug housing and interior into an assembly; also permits easy field conversion to reverse service (30, 60, 100, and 150 Amp).
9. Grounding strap in Style 2 plug from extra pole to plug housing.
10. Cable grip assembly.
11. Arc snuffing chamber.
12. Plug with clamping ring has neoprene gasket. Ring threads onto screw cap receptacle to provide NEMA 4X assembly when properly tightened.

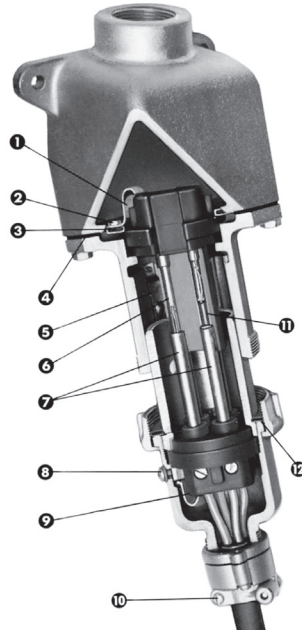

#### HORSEPOWER RATINGS FOR EMERGENCY DISCONNECT UNDER LOAD

- Not for normal starting and stopping, but plug may be withdrawn in an emergency if within these maximum HP ratings.

Phase Motor	Wire/Pole	Motor Horsepower			
		120 Vac	240 Vac	480 Vac	600 Vac
1-Phase	2W, 2P or 2W, 3P	7-1/2HP	15HP	30HP	30HP
3-Phase	3W, 3P; 3W, 4P; or 4W, 4P	10HP	20HP	40HP	40HP

#### SELECTION CHART

Grounding Style	Wire/Pole	Hub Size (Inches)	Receptacle with AJA Mounting Box ①	Receptacle Only ③	Clamping Ring Plug ②④	Connector Body Only	Cable Diameter (Inches)
100 Amp Style 1 (Shell Only)	2W, 2P	1-1/4	ADJA1022-125	ADR1022	ACP1022CD	ARC1022CD	0.875 to 1.906
		1-1/2	ADJA1022-150				
	3W, 3P	1-1/4	ADJA1033-125	ADR1033	ACP1033CD	ARC1033CD	
		1-1/2	ADJA1033-150				
	4W, 4P	1-1/2	ADJA1044-150	ADR1044	ACP1044CD	ARC1044CD	
		2	ADJA1044-200				
100 Amp Style 2 (Shell and Extra Pole)	2W, 3P	1-1/4	ADJA1023-125	ADR1023	ACP1023CD	ARC1023CD	
		1-1/2	ADJA1023-150				
	3W, 4P	1-1/2	ADJA1034-150	ADR1034	ACP1034CD	ARC1034CD	
		2	ADJA1034-200				

Receptacles are provided with spring door and screw cover.

For Reverse Service, add suffix **-RS** to Catalog Number.

For Special Polarization, add suffix **-P4** to Catalog Number.

① For additional mounting boxes, see Aluminum Mounting Boxes in Appleton Master Catalog.

② Plug and receptacle combination is NEMA 4X rated when clamping ring is fully tightened on receptacle.

③ Receptacle is NEMA 4X rated when screw cover is fully engaged when the receptacle is not in use.

④ Plug and connector body combination is NEMA 4X rated when clamping ring is fully tightened on connector body.

**APPLETON™**

United States: 1.800.621.1506 | Asia/Pacific: + 65.6556.1100 | Australia: + 61.3.9721.0348  
 Canada: + 1.888.765.2226 | China: + 86.21.3338.7000 | Europe: + 33.3.22.54.13.90  
 Mexico/Latin America: + 52.55.5809.5049 | Middle East/Africa/India: + 971.4.811.8100  
[www.masteringled.com](http://www.masteringled.com)

**EMERSON™**