



**UltraCon®+**  
Blue  
Carbon Steel  
3/16" & 1/4"  
Diameters



**UltraCon®+**  
Bronze  
Carbon Steel  
3/16" & 1/4"  
Diameters



**UltraCon®+**  
White  
Carbon Steel  
3/16" & 1/4"  
Diameters



**UltraCon®**  
Silver  
Carbon Steel  
5/16" Diameter



**UltraCon® SS4**  
410 Stainless Steel  
1/4" Diameter



**Crete-Flex®**  
410 Stainless Steel  
3/16" & #14  
Diameters



**Aggre-Gator®**  
304 Stainless Steel  
1/4" Diameter

## TYPICAL APPLICATIONS

- ▶ Temporary bracing
- ▶ Conduit clips
- ▶ Sill plate
- ▶ Window frames
- ▶ Furring strips
- ▶ Storm shutters

## BASE MATERIALS



Normal Weight Concrete



Masonry



Brick



Chemically Treated Lumber



Wood

Normal Weight Concrete	Masonry	Brick	Chemically Treated Lumber	Wood
UltraCon+	UltraCon+	UltraCon+	UltraCon+	UltraCon+
UltraCon (5/16")	UltraCon (5/16")			UltraCon (5/16")
Aggre-Gator	Aggre-Gator		Aggre-Gator	
Crete-Flex	Crete-Flex			
UltraCon SS4	UltraCon SS4			

**CARBON STEEL & STAINLESS STEEL  
CONCRETE SCREW ANCHORS**

**Concrete Screws**

## STALGARD ADVANTAGE:

# SUPERIOR CORROSION RESISTANCE

[illegible]

**■ NEW CONDITIONED FASTENER**


**FASTENER PROTECTED / ZINC OXIDE**

**FASTENER DAMAGED / IRON OXIDE**

ITW and Tapcon® are registered trademarks of Illinois Tool Works, Inc.

# ADVANTAGES OF GIMLET POINT

➤ Gimlet points provide extra bite into wood.

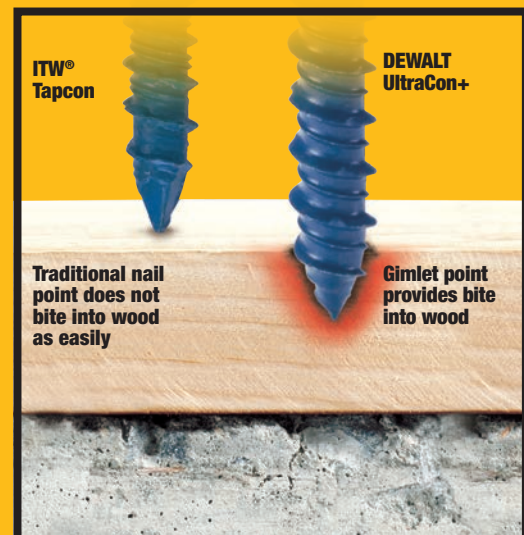



## THE MOST ICC-ES APPROVALS FOR MECHANICAL AND ADHESIVE ANCHORS IN THE INDUSTRY

### CONCRETE SCREW APPROVALS



ESR-3068 Concrete  
ESR-3196 Masonry  
ESR-3213 Chemically Treated Lumber  
ESR-3042 Wood-to-Wood



Miami-Dade NOA  
Notice of  
Acceptance



Florida  
Building  
Code

UltraCon+*	UltraCon+	UltraCon+
	UltraCon (5/16")	UltraCon (5/16")
	Aggre-Gator	Aggre-Gator
	Crete-Flex	Crete-Flex
	UltraCon SS4	UltraCon SS4

\*3/16" & 1/4" carbon steel UltraCon+ diameters are ICC approved in select lengths



➤ UltraCon+ ICC-ES Approved for use in concrete, masonry, chemically treated lumber and wood-to-wood applications.

### HEADSTYLE OFFERINGS

	COLOR	HEX WASHER	HEX TRIMFIT	HEX FLANGE	PHILLIPS FLAT	PHILLIPS TRIMFIT	PHILLIPS OVERSIZED	SIZE RANGE
UltraCon®+	Blue Stalgard Coating							Hex Washer Head: 3/16" x 1-1/4" to 3/16" x 4" 1/4" x 1" to 1/4" x 6"  Phillips Flat Head: 3/16" x 1-1/4" to 3/16" x 4" 1/4" x 1-1/4" to 1/4" x 6"
	White Stalgard Coating							Hex Washer Head: 3/16" x 1-1/4" to 3/16" x 3-1/4" 1/4" x 1-1/4" to 1/4" x 6"  Hex Flange Head: 1/4" x 1-3/4" to 1/4" x 3-1/4"  Phillips Flat Head: 3/16" x 1-1/4" to 3/16" x 3-3/4" 1/4" x 1-1/4" to 1/4" x 3-1/4"  Phillips Trimfit Head: 1/4" x 1-3/4" to 1/4" x 4"
	Silver Stalgard Coating							Hex Washer Head: 1/4" x 1-1/4" to 1/4" x 3-1/4"  Hex Flange Head: 1/4" x 1-3/4" to 1/4" x 3-1/4"  Phillips Flat Head: 3/16" x 1-1/4" to 3/16" x 3-3/4" 1/4" x 1-1/4" to 1/4" x 4"
	Bronze Stalgard Coating							Phillips Trimfit Head: 3/16" x 2-3/4" to 3/16" x 2-3/4" 1/4" x 2-3/4" to 1/4" x 4"
UltraCon® (5/16")	Silver Stalgard Coating							Hex Washer Head: 5/16" x 1-3/4" to 5/16" x 6"  Hex Trimfit Washer Head: 5/16" x 1-3/4" to 5/16" x 3-3/4"  Phillips Flat Head: 5/16" x 2-1/4" to 5/16" x 6"  Phillips Trimfit Head: 5/16" x 2-1/4" to 5/16" x 5"
Crete-Flex®	Silver Stalgard Coating							Hex Washer Head: 3/16" x 1-1/4" to 3/16" x 2-3/4" #14 x 1-1/4" to #14 x 3-3/4"  Hex Flange Head: #14 x 1-3/4" to #14 x 2-1/4"  Phillips Flat Head: 3/16" x 1-1/4" to 3/16" x 3-1/4" #14 x 1-1/4" to #14 x 6"  Phillips Trimfit Head: #14 x 1-3/4" to #14 x 2-3/4"  Phillips Oversized Head: 5/16" x 3" to 5/16" x 6"
Aggre-Gator®	Silver Stalgard Coating							Hex Washer Head: 1/4" x 1-1/4" to 1/4" x 4"  Phillips Trimfit Head: 1/4" x 1-1/4" to 1/4" x 4"
UltraCon® SS4	Silver Stalgard Coating							Hex Washer Head: 1/4" x 1-1/4" to 1/4" x 6"  Phillips Flat Head: 1/4" x 1-1/4" to 1/4" x 4"

# DEWALT®



GET THE  
**SYSTEM**

**OSHA** COMPLIANT

1926.1153

## DRILL / FASTEN



**DCH273**  
20V MAX® XR Brushless 1" L-Shape  
SDS Plus Rotary Hammer



**DCH263**  
20V MAX XR Brushless  
1-1/8" D-Handle Rotary Hammer

## ACCESSORIES



**DWH303DH**  
Dust Extractor for DCH273  
1" L-Shape SDS Plus  
Rotary Hammer



**DWH205DH**  
Dust Extractor for DCH263  
1-1/8" D-Handle SDS Plus  
Rotary Hammer



**DWH050**  
Large Hammer Dust Extraction  
- Hole Cleaning



**DWH200D**  
Dust Extraction Tube Kit  
With Hose

## EXTRACTORS



**DCV585**  
Flexvolt® 60V MAX®  
Dust Extractor



**DWH161D1**  
20V MAX® Brushless  
Universal Dust Extractor Kit



**DWV010**  
8 Gallon Wet/Dry HEPA/  
RRP Dust Extractor



**DWV012**  
10 Gallon Wet/Dry HEPA/  
RRP Dust Extractor

## DRILL / DRIVE SYSTEM

**DW5366**  
UltraCon+ Installation Kit:




Case



5/32" UltraCon+ Bit



3/16" UltraCon+ Bit




Drive Sleeve



#2 Phillips Bit



#3 Phillips Bit



1/4" Hex Socket



5/16" Hex Socket

\*For 20V MAX® Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

**1-800-4-DEWALT**

**www.DEWALT.com**

Copyright ©2019 DEWALT. The following are trademarks for one or more DEWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.

ICDWULTRACONSS