




GE
Lighting

13776 - F72T10/CW 15PK

GE T10 - Cold Temperature

- The T10 is designed to be used in cold temperature applications from 10 degrees F to 40 degrees F.

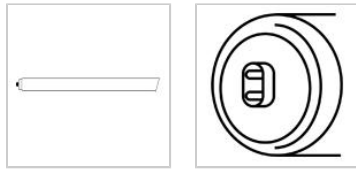

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning


- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

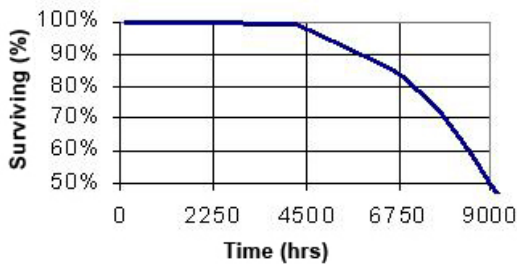

Graphs_Temperature Curve

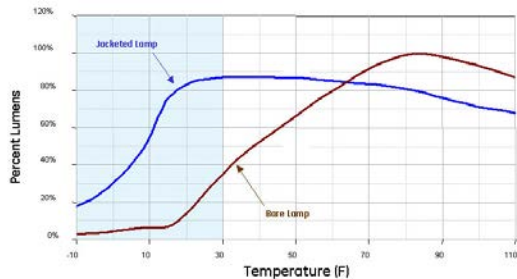

NOTES

- Because Power Groove® and Very High Output lamps are most used in commercial applications, the life rating is based on 12 hrs. per start.

Aug 6, 2014 9:40:38 AM

For additional information, visit www.gelighting.com

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight Linear
Bulb	T10
Base	Recessed Double Contact (R17d)
Rated Life (NOM)	9000.0 h
Rated Life (instant start) @ Time	9000 h @ 3 h
Bulb Material	Soda lime
Mercury Content (NOM)	90.0 mg
Picograms of Mercury (NOM)	1030.9 pg
Primary Application	Cold Temperature;Speciality

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	9700.0
Nominal Initial Lumens per Watt (NOM)	60.625
Color Temperature (NOM)	4100.0 K
Color Rendering Index (CRI) (NOM)	60.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	160.0
---------------	-------

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	72.000 in(1828.8 mm)
Nominal Length (NOM)	72.000 in(1828.8 mm)
Bulb Diameter (DIA) (NOM)	1.250 in(31.8 mm)

PRODUCT INFORMATION

Product Code	13776
Description	F72T10/CW 15PK
Standard Package	Case
Standard Package GTIN	10043168137765
Standard Package Quantity	15
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	15
UPC	043168137768