


Zinc - Threaded

Images

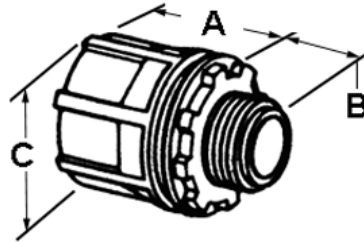

Application

To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105 degree c. UL listed

Product Information

Material: Zinc Die Cast
Finish: Ball burnished, mirror smooth

Certifications & Codes:

CSA File Number:	LR39354
Federal Specification Number:	A-A-50553
NEMA Standard:	FB-1
UL File Number:	E9391
UL Standard:	UL-514B
UNSPSC:	39121311

[Download Photo Image](#) [Download Dimensional Image](#)

Dimension A in Inches: 15/16

Dimension B in Inches: 5/8

Dimension C in Inches: 1-1/4

Catalog ID: 152-DC

UPC Number: 781747091529

Description: Threaded Hub, Zinc Die Cast, Size 3/4 Inch

Application: To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105 degree c. UL listed


Trade Size: 3/4"

Std Pkg Qty: 100

Unit Qty: 25

Zinc - Threaded

Images

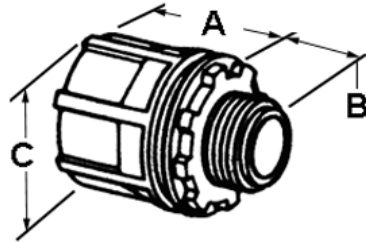

Application

To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105 degree c. UL listed

Product Information

Material: Zinc Die Cast
Finish: Ball burnished, mirror smooth

Certifications & Codes:

CSA File Number:	LR39354
Federal Specification Number:	A-A-50553
NEMA Standard:	FB-1
UL File Number:	E9391
UL Standard:	UL-514B
UNSPSC:	39121311

[Download Photo Image](#) [Download Dimensional Image](#)
Dimension A in Inches: 15/16
Dimension B in Inches: 5/8
Dimension C in Inches: 1-1/4

Catalog ID: 152-DC

UPC Number: 781747091529

Description: Threaded Hub, Zinc Die Cast, Size 3/4 Inch

Application: To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105 degree c. UL listed

Trade Size: 3/4"

Std Pkg Qty: 100

Unit Qty: 25