


Zinc - Threaded

Images

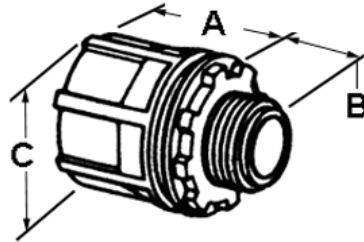

Application

To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105 degree c. UL listed Type 4 - Watertight

Product Information

Material: Zinc Die Cast
Finish: Ball burnished, mirror smooth

Certifications & Codes:

CSA File Number:	LR39354
Federal Specification Number:	A-A-50553
NEMA Standard:	FB-1
UL File Number:	E9391
UL Standard:	UL-514B
UNSPSC:	39121311

[Download Photo Image](#) [Download Dimensional Image](#)

Dimension A in Inches: 1-3/16

Dimension B in Inches: 3/4

Dimension C in Inches: 1-15/16

Catalog ID: 154-DC

UPC Number: 781747091543

Description: Threaded Hub, Zinc Die Cast, Size 1 1/4 Inch

Application: To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105 degree c. UL listed Type 4 - Watertight


Trade Size: 1-1/4"

Std Pkg Qty: 25

Unit Qty: 5

Zinc - Threaded

Images

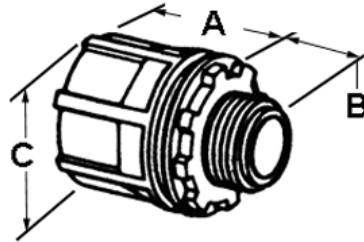

Application

To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105 degree c. UL listed Type 4 - Watertight

Product Information

Material: Zinc Die Cast
Finish: Ball burnished, mirror smooth

Certifications & Codes:

CSA File Number:	LR39354
Federal Specification Number:	A-A-50553
NEMA Standard:	FB-1
UL File Number:	E9391
UL Standard:	UL-514B
UNSPSC:	39121311

[Download Photo Image](#) [Download Dimensional Image](#)

Dimension A in Inches: 1-3/16

Dimension B in Inches: 3/4

Dimension C in Inches: 1-15/16

Catalog ID: 154-DC

UPC Number: 781747091543

Description: Threaded Hub, Zinc Die Cast, Size 1 1/4 Inch

Application: To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105 degree c. UL listed Type 4 - Watertight

Trade Size: 1-1/4"

Std Pkg Qty: 25

Unit Qty: 5