
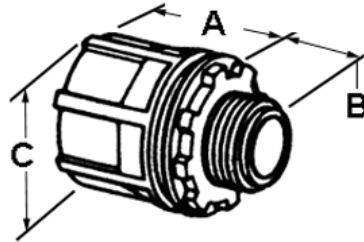


## Zinc - Threaded

### Images



### Application

To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105 degree c. UL listed Type 4 - Watertight

### Product Information

Material: Zinc Die Cast  
Finish: Ball burnished, mirror smooth

### Certifications & Codes:

CSA File Number:	LR39354
Federal Specification Number:	A-A-50553
NEMA Standard:	FB-1
UL File Number:	E9391
UL Standard:	UL-514B
UNSPSC:	39121311

[Download Photo Image](#)   [Download Dimensional Image](#)

Dimension A in Inches: 1-5/8  
Dimension B in Inches: 15/16  
Dimension C in Inches: 3-13/16

**Catalog ID:** 158-DC

**UPC Number:** 781747091581

**Description:** Threaded Hub, Zinc Die Cast, Size 3 Inch

**Application:** To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105 degree c. UL listed Type 4 - Watertight

**Trade Size:** 3"



**Country of Manufacture:** USA

**Std Pkg Qty:** 5

**Unit Qty:** Bulk

## Zinc - Threaded

### Images

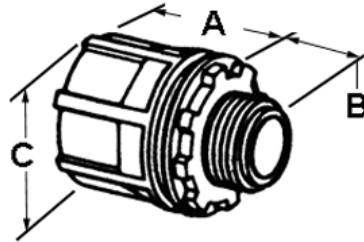

### Application

To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105 degree c. UL listed Type 4 - Watertight

### Product Information

Material: Zinc Die Cast  
Finish: Ball burnished, mirror smooth

### Certifications & Codes:

CSA File Number:	LR39354
Federal Specification Number:	A-A-50553
NEMA Standard:	FB-1
UL File Number:	E9391
UL Standard:	UL-514B
UNSPSC:	39121311

[Download Photo Image](#)   [Download Dimensional Image](#)

Dimension A in Inches: 1-5/8

Dimension B in Inches: 15/16

Dimension C in Inches: 3-13/16

**Catalog ID:** 158-DC

**UPC Number:** 781747091581

**Description:** Threaded Hub, Zinc Die Cast, Size 3 Inch

**Application:** To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105 degree c. UL listed Type 4 - Watertight

**Trade Size:** 3"

**Country of Manufacture:** USA

**Std Pkg Qty:** 5

**Unit Qty:** Bulk