



INDUSTRIAL
COMMERCIAL
RESIDENTIAL

A-21 STRAIGHT BLADE RECEPTACLES

TESTING & CODE COMPLIANCE

- UL Listed: 1263, 1231, 1233: (file no. E15058). CSA file 6914 (6233-01). 83 & 41: UL (file no. E15012), CSA file 2081 (6221-02). 5716N to 498, meets UL Federal Spec. WC-596 (file no. E2369).
- CSA Certified to C22.2 no. 42.
- NOM Certified, except as noted.


MATERIAL CHARACTERISTICS

Temperature Rating: -20°C (without impact) to 75°C max. continuous. 5716N: V2 rated; -40°C (without impact) to 105°C max. continuous.




Commercial Specification Grade Straight Blade Power Devices


2 Pole, 3 Wire Grounding
NEMA TT-30, 5-30
30A 125V



1263




1264

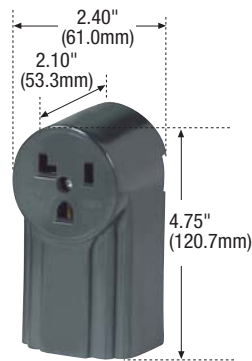

1231



41



5716N

Power Devices

FEATURES

- Heavy gauge steel mounting strap zinc-plated for corrosion resistance.
- Receptacles for use with copper or aluminum wire.
- Surface receptacles have patented lay-in terminals and accept up to #4 wire.
- Universal plugs include blades for 30A configurations.
- Surface receptacles 0.75" (19.05mm) and 1.0" (25.4mm) concentric knockouts and adjustable cord clamp allow for wiring from bottom or back.
- Flush receptacles fit one or two gang enclosures.
- High strength glass reinforced nylon body resists breakage in high abuse areas for Catalog No. 5716N.

NEMA TT-30 Rating 30A 125V

Receptacles

Description	Color	Catalog No.
Flush	Brown	1263*
Panel Mount (by special order only)	Brown	U1263*

*Not NOM

Plugs

Description	Color	Catalog No.
Angle Travel Trailer	Black	83

Adapter

Description	Color	Catalog No.
Travel Trailer Plug to Female Receptacle - 15A or 20A 125V NEMA 5-15R or 5-20R	Black	1264†

†1264 is not CSA approved

NEMA 5-30 Rating 30A 125V


Receptacles

Description	Color	Catalog No.
Surface	Black	1231†
Flush	Black	5716N
Flush	Brown	1233

Plugs

Description	Color	Catalog No.
Angle Universal - Vinyl	Black	41

†Not UL Listed



TT-30R

TT-30P

5-30R

5-30P