

BOLLARD RETROFITS 360° OMNI DIRECTIONAL DESIGN



| | | | | | | | | |
|----------|----------------------|----------------|----------------|----------|------------------|-----|------------|----------|
| | | | | | | | | |
| VOLTAGE* | MEDIUM + MOGUL BASES | INSTALL METHOD | OPERATING TEMP | MOUNTING | SURGE PROTECTION | CRI | RATED LIFE | WARRANTY |

three color temps in one



change color temperatures with the click of a switch

- Default setting is 4000K but can be changed to 3000K or 5000K with a flip of a switch.
- Available in 11W, 14W, 18W & 24W models replacing up to 150W HID.
- FlexColor allows for a reduction of skus needed to be stocked.
- Multi-directional mounting capability & 360° design. Use base down, base up or base sideways without affecting performance.
- Pretested & potted drivers are burnt in 3x prior to shipping and protected against vibration & moisture.
- Expertly engineered to work efficiently in enclosed fixtures & damp environments, while also protected against insects & dust.
- Dual stage MOV protection with integrated 6kA surge.

| PART # | UPC | REPLACES | WATTAGE | LUMENS | CCT (K)** | BASE |
|----------------|--------------|----------|---------|----------------|-------------------|------|
| LED-8037E345-A | 844006059378 | 50W | 11W | 1550/1610/1650 | 3000K/4000K/5000K | E26 |
| LED-8038E345-A | 844006059392 | 70W | 14W | 1850/1950/1990 | 3000K/4000K/5000K | E26 |
| LED-8039E345-A | 844006059415 | 100W | 18W | 2450/2560/2610 | 3000K/4000K/5000K | E26 |
| LED-8039M345-A | 844006059439 | 100W | 18W | 2450/2560/2610 | 3000K/4000K/5000K | EX39 |
| LED-8029E345-A | 844006059453 | 150W | 24W | 3170/3330/3360 | 3000K/4000K/5000K | E26 |
| LED-8029M345-A | 844006059477 | 150W | 24W | 3170/3330/3360 | 3000K/4000K/5000K | EX39 |


* See page 2 for 347 volt options for Canada

** Default setting is 4000K.



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
 847.380.3540 • led-llc.com

BOLLARD RETROFITS 360° OMNI DIRECTIONAL DESIGN

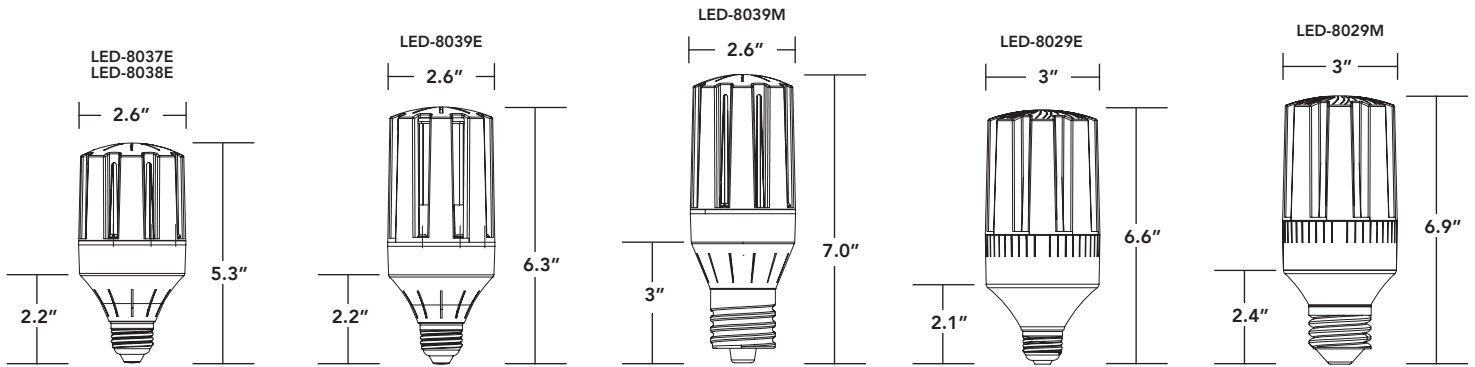

ORDERING GUIDE

| PART # | UPC | REPLACES | WATTAGE | LUMENS | CCT (K) | BASE |
|----------------|--------------|----------|---------|-------------------------|----------------------------|------|
| LED-8037E345-A | 844006059378 | 50W | 11W | 1550/ 1610 /1650 | 3000K/ 4000K /5000K | E26 |
| LED-8038E345-A | 844006059392 | 70W | 14W | 1850/ 1950 /1990 | 3000K/ 4000K /5000K | E26 |
| LED-8039E345-A | 844006059415 | 100W | 18W | 2450/ 2560 /2610 | 3000K/ 4000K /5000K | E26 |
| LED-8039M345-A | 844006059439 | 100W | 18W | 2450/ 2560 /2610 | 3000K/ 4000K /5000K | EX39 |
| LED-8029E345-A | 844006059453 | 150W | 24W | 3170/ 3330 /3360 | 3000K/ 4000K /5000K | E26 |
| LED-8029M345-A | 844006059477 | 150W | 24W | 3170/ 3330 /3360 | 3000K/ 4000K /5000K | EX39 |



347 VOLT OPTIONS FOR CANADA



| PART # | UPC | REPLACES | WATTAGE | LUMENS | CCT (K) | BASE |
|-----------------|--------------|----------|---------|-------------------------|----------------------------|------|
| LED-8037E345C-A | 844006059385 | 50W | 11W | 1550/ 1610 /1650 | 3000K/ 4000K /5000K | E26 |
| LED-8038E345C-A | 844006059408 | 70W | 14W | 1850/ 1950 /1990 | 3000K/ 4000K /5000K | E26 |
| LED-8039E345C-A | 844006059422 | 100W | 18W | 2450/ 2560 /2610 | 3000K/ 4000K /5000K | E26 |
| LED-8039M345C-A | 844006059446 | 100W | 18W | 2450/ 2560 /2610 | 3000K/ 4000K /5000K | EX39 |
| LED-8029E345C-A | 844006059460 | 150W | 24W | 3170/ 3330 /3360 | 3000K/ 4000K /5000K | E26 |
| LED-8029M345C-A | 844006059484 | 150W | 24W | 3170/ 3330 /3360 | 3000K/ 4000K /5000K | EX39 |



Light Efficient Design

LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
 847.380.3540 • led-llc.com