

LED Tubes

Refit Solutions from GE



Description

Convert your existing linear fluorescent fixture to LED lighting without needing a comprehensive reinstall. LED tubes are ideal for those seeking high energy savings with minimal installation time. Each LED tube is operated by a GE Lightech™ driver. *See reverse for LED tubes and Lightech driver product details.*

LED Tubes Ranking among Complete Refit Solutions Portfolio

| | GOOD | BETTER | BEST |
|-------------------------------|------|--------|------|
| Initial Acquisition Costs | | ✓ | |
| Installation Time/Cost | | | ✓ |
| Energy Costs | | | ✓ |
| Total Life Cycle Costs | | | ✓ |
| Light Distribution/Aesthetics | ✓ | | |

Features


- 4' tubes
- 2,100 to 2,200 lumen options available
- 100-105 total system lumens per watt (LPW)
- Choice of four color temperatures (3500°K, 4000°K, 5000°K, 6500°K)
- 50,000-hour rated life
- UL-approved technologies – in compliance with UL 1598 certification
- DLC listed

Savings Breakdown

Save 61% compared to standard T8 (4-lamp) light fixtures over a five-year period.

Provides 4200 lumens at 42W vs. 6600 lumens at 148W in a 4 lamp T12 system.

Cumulative Energy Costs

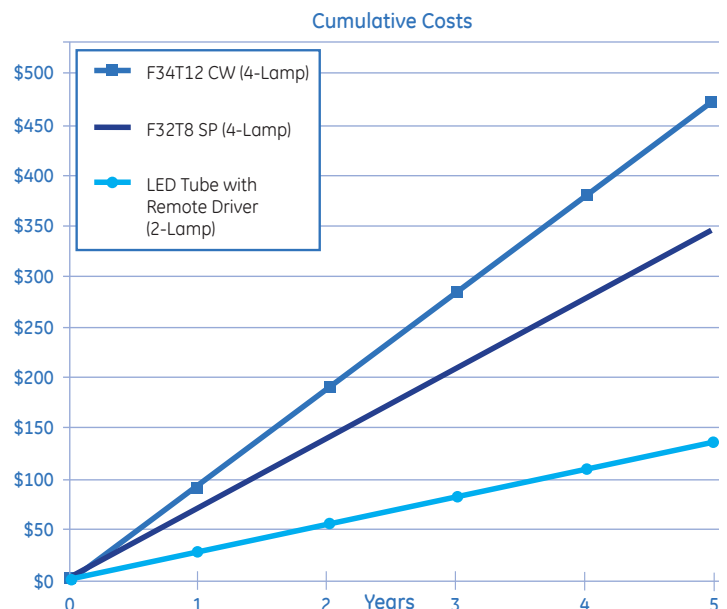

Savings calculations are based on energy costs using \$0.11 per kWh and 16 hours of daily operation.

Product Specifications

Refit LED Tubes

| GE Product Code | Description | Bulb Shape | Base | Watts | Case Qty | Length (in) | Initial Lumens | Color Temp (°K) | CRI | Rated Life (L70) |
|-----------------|---------------|------------|---------------------|-------|----------|-------------|----------------|-----------------|-----|------------------|
| 94381 | LED21T8/4/835 | T8 | Medium Bi-Pin (G13) | 18 | 10 | 48 | 2100 | 3500 | 80 | 50,000 |
| 94382 | LED21T8/4/840 | T8 | Medium Bi-Pin (G13) | 18 | 10 | 48 | 2100 | 4000 | 80 | 50,000 |
| 94383 | LED21T8/4/850 | T8 | Medium Bi-Pin (G13) | 18 | 10 | 48 | 2200 | 5000 | 80 | 50,000 |
| 26059 | LED21T8/4/865 | T8 | Medium Bi-Pin (G13) | 18 | 10 | 48 | 2200 | 6500 | 80 | 50,000 |

Lightech Drivers - Non-Dimming

| GE Product Code | Description | # of Lamps |
|-----------------|---------------|------------|
| 94384 | LED21T8/DR/1L | 1 |
| 94385 | LED21T8/DR/2L | 2 |

Lightech Drivers - Dimming

| GE Product Code | Description | # of Lamps |
|-----------------|-----------------|------------|
| 60041 | LED21T8/DR/D/2L | 2 |
| 62030 | LED21T8/DR/D/4L | 4 |

General Characteristics - Non-Dimming

| Product Code | 94384 | 94385 |
|-------------------------|----------|--------|
| Output Current (A) | 0.62 | 0.62*2 |
| Input Wattage Range (W) | 21 | 42 |
| Input Voltage (V) | 120-277V | |
| Input Frequency (Hz) | 50/60Hz | |
| Efficiency (%) | > .9% | |
| Output Type | DC | |
| Output Voltage Range | 27-33V | |
| Dimmability | No | |
| Ambient Temperature Min | -4°F | |
| Ambient Temperature Max | 104°F | |
| Case Temperature | 158°F | |

General Characteristics - Dimming

| Product Code | 60041 | 62030 |
|-------------------------|----------|--------|
| Output Current (A) | 0.62*2 | 0.62*4 |
| Input Wattage Range (W) | 42 | 84 |
| Input Voltage (V) | 120-277V | |
| Input Frequency (Hz) | 50/60Hz | |
| Efficiency (%) | > .9% | |
| Output Type | DC | |
| Output Voltage Range | 27-33V | |
| Dimmability | 0 - 10V | |
| Ambient Temperature Min | -4°F | |
| Ambient Temperature Max | 104°F | |
| Case Temperature | 158°F | |

Dimensions - Non-Dimming

| Product Code | 94384 | 94385 |
|-------------------------|-------|-------|
| Weight | 1.01 | 1.08 |
| Casing Length (in) | 9.5 | |
| Casing Width (in) | 1.3 | |
| Casing Height (in) | 1 | |
| Lead Exit Length (in) | 26 | |
| Input Wire Length (in) | 36 | |
| Output Wire Length (in) | 38 | |

Dimensions - Dimming

| Product Code | 60041 | 62030 |
|-------------------------|-------|-------|
| Weight | 1.01 | 1.08 |
| Casing Length (in) | 9.5 | 9.5 |
| Casing Width (in) | 1.3 | 1.7 |
| Casing Height (in) | 1 | 1 |
| Lead Exit Length (in) | 26 | 26 |
| Input Wire Length (in) | 36 | 36 |
| Output Wire Length (in) | 38 | 42 |



www.gelighting.com

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2014 GE.

14671 (Rev 10/14/14)