
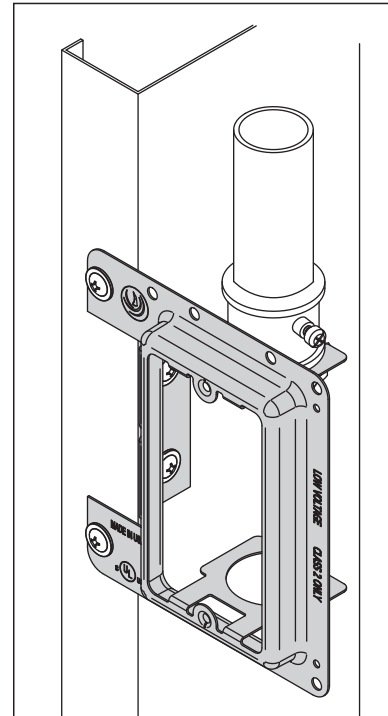


Available Finishes / Materials:

PG -- Pre-Galvanized zinc

Standard Finish: PG

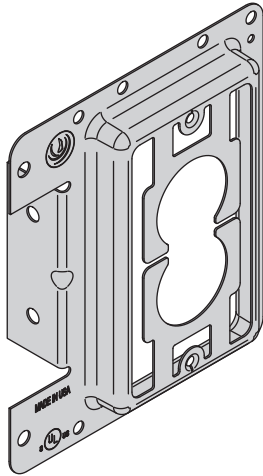

- Wood or Metal Studs
- New work design requires a screw gun for installation.
- Inner tabs allow 3/4" EMT or 1/2" EMT with reducer fitting for conduit applications if required.
- Can be mounted vertically or horizontally on wood or metal studs.
- Replaces electrical box in Class 2 low voltage installations.
- Use with STS8 screws, see page 72.
- **Material:** Steel
- **Finish:** Pregalvanized

Catalog No.	Drywall Thickness	Box Qty
LVPN	1/2" thru 5/8"	25

Material Specifications and Finishes

Carbon Steel – ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

PG – ASTM A653 G-90 Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills. The coils or sheets are slit to size and fabricated by forming, shearing or punching to produce the finished product. During fabrication cut edges are not generally zinc coated; however, the zinc near the uncoated metal becomes a sacrificial anode to protect the bare areas.

Note: Specifications subject to change without notice.

Project:	Date:	Phone:
Submitted By:	Address:	
Comment		