

# CXTEU LED Exit & Incandescent Emergency Combo



Project:	
Type:	
Catalog #:	



## STANDARD



## OPTIONAL

### ILLUMINATION

- Two fully-adjustable 5.4 watt, glare-free lamp heads.
- Smooth thermoplastic reflector and plastic lens for optimal light distribution.
- Ultra-bright, energy efficient, long-life Red or Green LED exit sign illumination.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable Sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board/lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

### HOUSING

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.


### OPTIONS

- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes.
- HTR: Optional internal heater for cold temperature applications.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (20°C – 40°C)

### DIMENSIONS

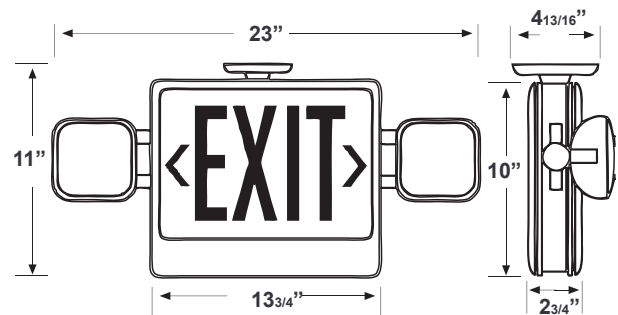

Sample Part Number: **CXTEU-1-R-W**

### ORDERING INFORMATION

Special voltage and SALIDA face plate options available. Check with your Best Lighting Representative.

Model	No. of faces	Letter Color	Housing Color	Options
CXTEU	1 Single Face	R Red	W White	RC Remote Capacity
	2 Universal Single/Double Face	G Green	B Black	SDT Self-diagnostics HTR Internal Heater USA Assembled in USA

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

## ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
CXTEU/SDT	10	10	0.10	0.05
CXTEU-RC/RC-SDT	15	15	0.12	0.06

## CENTER-TO-CENTER SPACING GUIDELINES

Consult factory for details.

## REMOTE LAMP COMPATIBILITY

	Maximum Wattage Allowed
CXTEU-RC	11

Remote Head Family	Total Wattage
RH1-6V5.4W	5.4
RH1-6V7.2W	7.2
RH1-6V9W	9
RH2-6V5.4W	10.8
RHR-1-6V5.4W	5.4
RHR-1-6V7.2W	7.2
RHR-1-6V9W	9
RHR-2-6V5.4W	10.8
RH16-1-6V5W	5
RH16-2-6V5W	10
RH1-WP-6V5.4W	5.4
RH1-WP-6V7.2W	7.2
RH1-WP-6V9W	9
RH2-WP-6V5.4W	10.8