
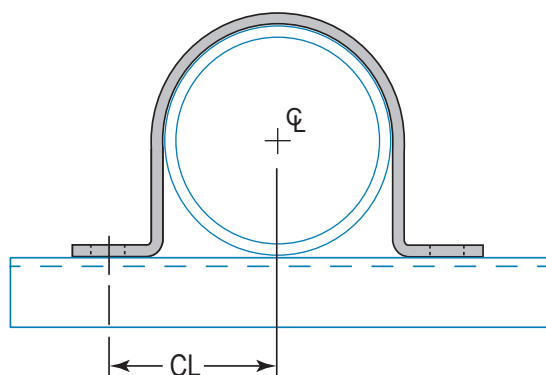


Available Finishes / Materials:

- ☐ EG -- Electro-galvanized
- ☐ HD -- Hot dipped galvanized
- ☐ S4 -- 304 stainless steel
- ☐ S6 -- 316 stainless steel
- ☐ YC -- Yellow chromate

Standard Finish: EG

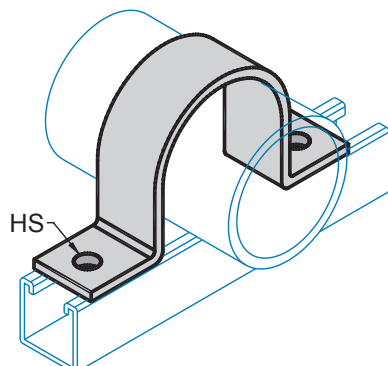

Catalog Number	Wt. lbs	Pipe Size		HS		CL	
		in	mm	in	mm	in	mm
PS2 0050EG	0.23	1/2	15	5/16	7.9	1 1/8	23.8
PS2 0075EG	0.26	3/4	20	5/16	7.9	1 3/16	25.4
PS2 0100EG	0.29	1	25	5/16	7.9	1 5/16	28.6
PS2 0125EG	0.34	1 1/4	32	5/16	7.9	1 7/16	33.3
PS2 0150EG	0.37	1 1/2	40	5/16	7.9	1 9/16	36.5
PS2 0200EG	0.92	2	50	7/16	11.1	2 1/8	54.0
PS2 0250EG	1.08	2 1/2	65	7/16	11.1	2 3/8	60.3
PS2 0300EG	1.33	3	80	7/16	11.1	2 11/16	68.3
PS2 0350EG	1.43	3 1/2	90	7/16	11.1	2 15/16	74.6
PS2 0400EG	1.66	4	100	9/16	14.2	3 3/16	81.0
PS2 0500EG	1.95	5	125	9/16	14.2	3 3/4	95.2
PS2 0600EG	2.27	6	150	9/16	14.2	4 1/4	107.9
PS2 0800EG	2.75	8	203	9/16	14.2	5 1/4	133.3
PS2 1000EG	3.43	10	254	9/16	14.2	6 5/16	160.3
PS2 1200EG	3.96	12	305	9/16	14.2	7 5/16	185.7

Material Specifications and Finishes

Carbon Steel – ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

EG – Electro-Galvanized. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts. Recommended for relatively dry indoor use. This is the standard coating for most Jet Stream products. Thickness of applied zinc is between 0.2 mils to 0.5 mils [5.1 µm to 12.7 µm]. Coatings on Jet Stream EG products meet ASTM B633 SC1 Type III.

HD – Hot Dip Galvanized After Fabrication. Fabricated product is dipped in molten zinc and is completely covered on all surfaces. Recommended for outdoor use. Coatings on Jet Stream HD products meet ASTM A123/153. The zinc coating is typically 2.6 mils [66.0 µm] or 1.5 oz. per square foot [0.46 kg per square meter] per side.

S4 – 304 Stainless Steel – ASTM A240 (Type 304)

S6 – 316 Stainless Steel – ASTM A240 (Type 316),
316 Stainless Steel Nuts – ASTM A276-03

YC – Yellow Zinc Dichromate. A 0.5 mil [12.7 µm] electro-galvanized zinc plating meeting ASTM B633 SC1 Type III is applied to the surface of the metal. Yellow Dichromate is applied over the zinc. This results in a yellowish gold appearance and acts as a nonporous barrier sealant that is corrosion resistant and can be painted.

Note: Specifications subject to change without notice.

Project:	Date:	Phone:
Submitted By:	Address:	
Comment		