


Available Finishes / Materials:

☐ PG -- Pre-Galvanized zinc

Standard Finish: PG

The RSB Series provides a longer mounting surface with strut lengths up to 47.5". Custom lengths and finishes are available upon request. Standard strut straps are used to secure pipes and tubing.

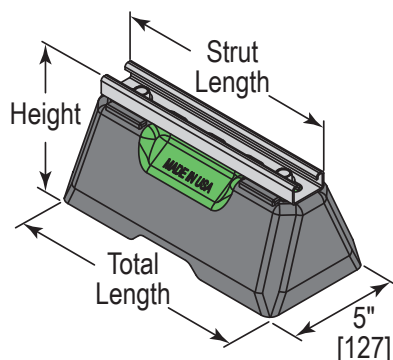

Catalog Number	No. of Bases	Height	Strut Length	Total Length	Weight (Lbs)	Uniform Load Capacity *	
						Lbs	kN
RSB-Support With ¹³ / ₁₆ " Pre-Galv. 14 Gauge Steel Channel							
RSB 1081PG	1	4- ¹³ / ₁₆ "	10"	11"	4.8	1,000	4.4
RSB22481PG	2		24"	25"	9.7	2,000	8.8
RSB33681PG	3		36"	37"	14.6	3,000	13.3
RSB44881PG	4		48"	49"	19.5	4,000	17.8
RSB-Support With 1- ⁵ / ₈ " Pre-Galv. 12 Gauge Steel Channel							
RSB 1016PG	1	5- ⁵ / ₈ "	10"	11"	5.5	1,000	4.4
RSB22416PG	2		24"	25"	11.4	2,000	8.8
RSB33616PG	3		36"	37"	17.2	3,000	13.3
RSB44816PG	4		48"	49"	23	4,000	17.8
RSB Support With 2- ⁷ / ₁₆ " Pre-Galv. 12 Gauge Steel Channel							
RSB 1024PG	1	6- ⁷ / ₁₆ "	10"	11"	6.0	1,000	4.4
RSB22424PG	2		24"	25"	12.4	2,000	8.8
RSB33624PG	3		36"	37"	18.8	3,000	13.3
RSB44824PG	4		48"	49"	25.2	4,000	17.8

** This load is only for the capacity of the components in this assembly.*

Please consult roofing manufacturer or engineer for roof load capacity.

* This load is only for the capacity of the components in this assembly.

Please consult roofing manufacturer or engineer for roof load capacity.

Material Specifications and Finishes

Carbon Steel – ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

PG – ASTM A653 G-90 Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills. The coils or sheets are slit to size and fabricated by forming, shearing or punching to produce the finished product. During fabrication cut edges are not generally zinc coated; however, the zinc near the uncoated metal becomes a sacrificial anode to protect the bare areas.

Note: Specifications subject to change without notice.

Project:	Date:	Phone:
Submitted By:	Address:	
Comment		