

Leviton Load Center Hydraulic Magnetic Branch Circuit Breakers



APPLICATION

Ideal for harsh climates, Hydraulic Magnetic circuit breakers offer more precise trips based on current, even in extreme temperatures: from -40°C to 85°C, without re-rating.

The most advanced circuit breakers on the market are now the fastest to install. Only Leviton circuit breakers feature an all plug on design, so you can wire the entire panel at rough-in, without a single circuit breaker present.

Intuitive diagnostics such as LEDs on electronic circuit breakers indicate fault type and color indicators in each rocker handle display operational status at-a-glance.

FEATURES AND BENEFITS

- **Precision:** Offers more precise trips based on current, even in extreme temperatures: -40°C to 85°C, without re-rating
- **Simple:** Features an all plug-on installation - no wiring to circuit breakers less than 70A
- **Intuitive:** Line-side powered LEDs stay lit, even after a circuit breaker has tripped, and identify cause of trip. Color indicators in each rocker handle designate operational status at-a-glance (ON/OFF/Tripped)

PRODUCT SPECIFICATIONS

PRODUCT FEATURES

Dimensions:
Single Pole 3.9" H x 1.0" W x 3.1" D
Double Pole 3.9" H x 2.0" W x 3.1" D
Operating Temperature: -40°C to 85°C (-40°F to 185°F)
Warranty: 10-Year Limited, 2-Years for electronic components
Weight: Single Pole 0.42 lbs.
Double Pole 0.85 lbs.
Wiring: All Plug-on up to 60A

Electrical Specifications

Amperage: Refer to catalog number tables
Breaker Technology: Hydraulic Magnetic
Short Circuit Current Rating: 10 KA, Series Rated 22KA with Leviton
Main Breaker; see Series Ratings Tables for additional Ratings
Type: Available in Standard, AFCI, GFCI, AFCI/GFCI, GFPE

Standards & Certifications

CSA-C22.2 No. 5-02
EMC Compatible
FCC
RoHS
UL 489, HACR rated
UL 943 (GFCI), where applicable
UL 1699 (AFCI), where applicable

ORDERING INFORMATION

Standard



Amp Rating	1-Pole	2-Pole
15	LB115	LB215
20	LB120	LB220
25	LB125	LB225
30	LB130	LB230
35	-	LB235
40	-	LB240
45	-	LB245
50	-	LB250
60	-	LB260
70	-	LB270
80	-	LB280
90	-	LB290
100	-	LB200
110	-	LB211
125	-	LB212

GFCI - 5 mA Ground-Fault
Protection of Personnel



Amp Rating	1-Pole	2-Pole
15	LB115-GF	LB215-GF
20	LB120-GF	LB220-GF
25	LB125-GF	LB225-GF
30	LB130-GF	LB230-G
40	-	LB240-GF
50	-	LB250-GF
60	-	LB260-GF

GFPE - 30 mA Ground-Fault
Protection of Equipment



Amp Rating	1-Pole	2-Pole
15	LB115-EP	LB215-EP
20	LB120-EP	LB220-EP
25	LB125-EP	LB225-EP
30	LB130-EP	LB230-EP
40	-	LB240-EP
50	-	LB250-EP
60	-	LB260-EP

AFCI





Amp Rating	1-Pole	2-Pole
15	LB115-AF	LB215-AF
20	LB120-AF	LB220-AF

AFCI/GFCI - Dual Function





Amp Rating	1-Pole
15	LB115-DF
20	LB120-DF

DIMENSIONAL DRAWINGS

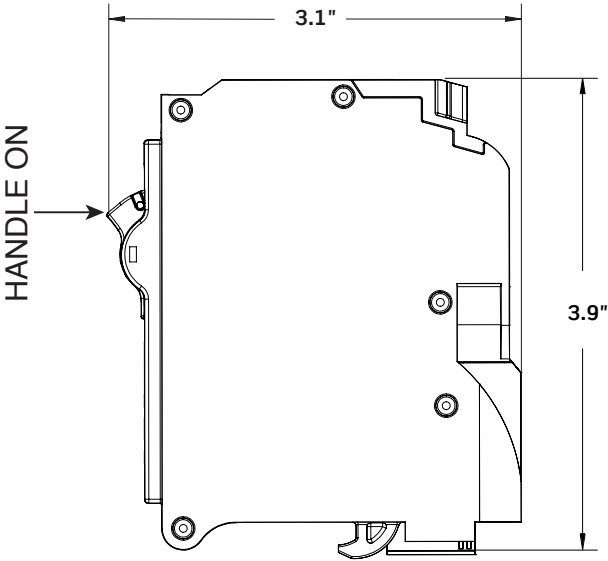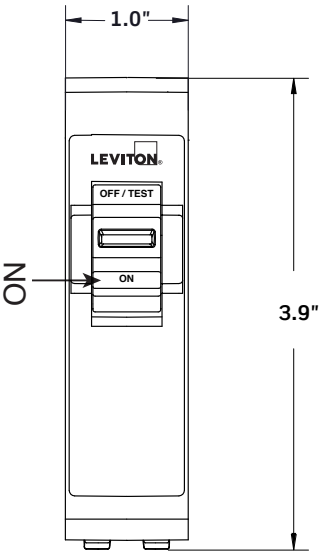

Single Pole

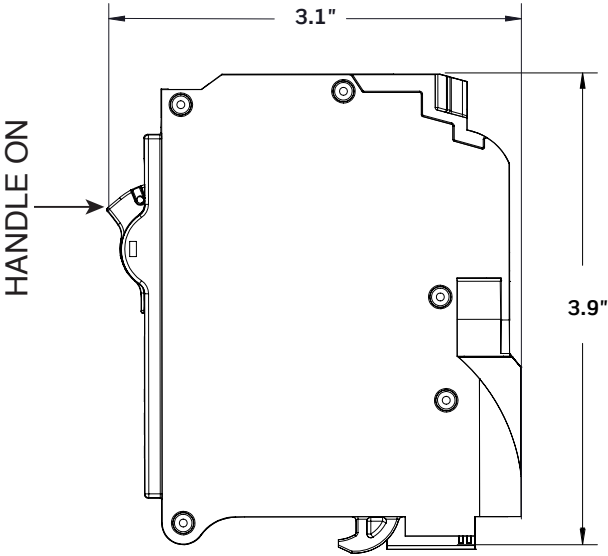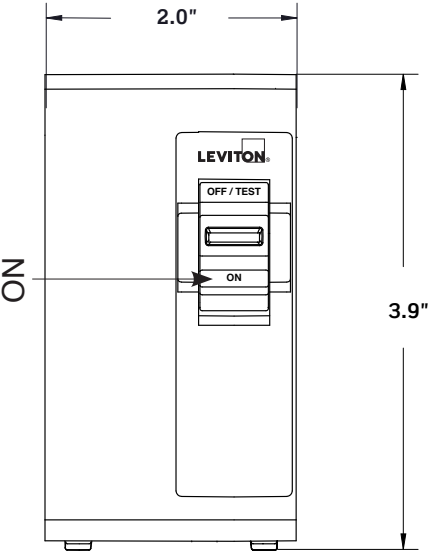

Double Pole

HANDLE OPERATION AND LED DIAGNOSTICS

Handle Window	"AF" LED	"GF" LED	Device Status
GREEN	OFF	OFF	ON
RED	OFF	OFF	Overload or short-circuit trip
RED	ON (solid)	OFF	Series arc-fault trip
RED	OFF	ON (solid)	Ground-fault trip or Parallel arc-fault to Ground
RED	ON (blinking)	OFF	0.5 sec. delay -Parallel arc-fault trip
RED	OFF	ON (blinking)	3 sec. delay - Neutral Miswired
RED	ON (blinking)	ON (blinking)	0.1 sec. delay -Electronics self-test failure (breaker will be locked out and must be replaced)
WHITE	OFF	OFF	Manual OFF



Leviton Manufacturing Co., Inc.

Tech Line: 1-800-824-3005

Mon-Fri 8am-10pm EST, Saturday 9am-7pm EST, Sunday 9am-5pm EST

For 24/7 product support visit www.leviton.com/support

Visit our Website at: www.leviton.com/loadcenter

© 2021 Leviton Manufacturing Co., Inc. All rights reserved.
All trademarks are the property of their respective owners.

GR-081221A-tp