

Rittal – The System.

Faster – better – worldwide.

**► Catalog 33
North American Edition 2012**

500

Rittal. Power and Vision!

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES



Base

Base



Condensate discharge


For reliable discharge from the inside and protection against splashes from the outside (labyrinth effect). A hole diameter of .63" (16 mm) is required. (With AE carbon steel, the holes are already provided in the base.)

Material:
Polyamide

Color:
Similar to RAL 7035

Protection rating:
IP 55 to IEC 60 529, subject to correct mounting at the bottom

| Packs of | Part No. |
|----------|----------|
| 6 | 2459.000 |

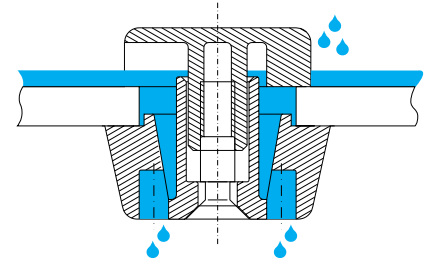

Gland plates

for CS New Basic enclosures

For sealing the base opening and for cable entry.

Material:
Carbon steel

Surface finish:
Powder-coated, zinc-plated

Color:
RAL 7035

Configuration:
Assembly parts

| For enclosure dimensions | | Packs of | Part No. |
|--------------------------|-------------------|----------|--------------|
| Width inches (mm) | Depth inches (mm) | | |
| 24 (600) | 16 (400) | 1 set | 9785.511 |
| 24 (600) | 20 (500) | 1 set | 9785.514 |
| 32 (800) | 16 (400) | 1 set | 9785.512 |
| 32 (800) | 20 (500) | 1 set | 9785.513 |
| 47 (1200) | 16 (400) | 1 set | 2 x 9785.511 |
| 47 (1200) | 20 (500) | 1 set | 2 x 9785.514 |



Oiltight hole seals

Oiltight hole seals are used to seal unused or empty pushbutton holes, conduit openings, and knockout

Material:
Carbon Steel:
RAL 7035 (light grey)
Type 304 stainless steel

Hole Seals:

- 12 sizes
- Covers holes with a 0.19" diameter
- Can be used on material thickness up to 0.31"
- Oil-resistant gasket
- UL/cUL Type 12, 4/4X and 13

| Oiltight Hole Seals - Carbon Steel | |
|--|----------|
| Description | Part No. |
| Miniature Oiltight Pushbutton Hole 22.5 mm (IEC) | OHSMPBC |
| 0.50" Conduit Hole | OHS050C |
| 0.75" Conduit Hole | OHS075C |
| Standard Oiltight Pushbutton Hole 30.5 mm (NEMA) | OHSPPBC |
| 1.00" Conduit Hole | OHS100C |
| 1.25" Conduit Hole | OHS125C |
| 1.50" Conduit Hole | OHS150C |
| 2.00" Conduit Hole | OHS200C |
| 2.50" Conduit Hole | OHS250C |
| 3.00" Conduit Hole | OHS300C |
| 3.50" Conduit Hole | OHS350C |
| 4.00" Conduit Hole | OHS400C |

| Oiltight Hole Seals - Stainless Steel 304 | |
|--|----------|
| Description | Part No. |
| Miniature Oiltight Pushbutton Hole 22.5 mm (IEC) | OHSMPB6 |
| 0.50" Conduit Hole | OHS0506 |
| 0.75" Conduit Hole | OHS0756 |
| Standard Oiltight Pushbutton Hole 30.5 mm (NEMA) | OHSPPB6 |
| 1.00" Conduit Hole | OHS1006 |
| 1.25" Conduit Hole | OHS1256 |
| 1.50" Conduit Hole | OHS1506 |
| 2.00" Conduit Hole | OHS2006 |
| 2.50" Conduit Hole | OHS2506 |
| 3.00" Conduit Hole | OHS3006 |
| 3.50" Conduit Hole | OHS3506 |
| 4.00" Conduit Hole | OHS4006 |