

# Standard Grade Straight Blade Duplex & CO/ALR Receptacles

2 Pole, 3 Wire Grounding  
15A 125V



INDUSTRIAL  
COMMERCIAL  
RESIDENTIAL

**A-16**  
STRAIGHT BLADE  
RECEPTACLES

## TESTING & CODE COMPLIANCE

- UL Listed to 498 (file no. E15058)
- CSA (file no. 6914 (6233-01)).
- Meets all CSA requirements, C22.2 no. 42.
- NOM certified.

## MATERIAL CHARACTERISTICS

Meets flammability requirements per UL 94, VO rated. Temperature Rating: -40°C to 65°C.


## Standard Grade CO/ALR Duplex Receptacles

### FEATURES

- Side wire terminals accept up to #10 solid or stranded copper or solid aluminum wire.
- Combination slot/Phillips head mounting and terminal screws ease installation.
- Terminal screws backed out – ready for wiring.

### Side Wire

Rating A	V	NEMA	Description	Color	Catalog No.
15	125	5-15R	Copal	Brown	5270B
				Ivory	5270V
				White	5270W

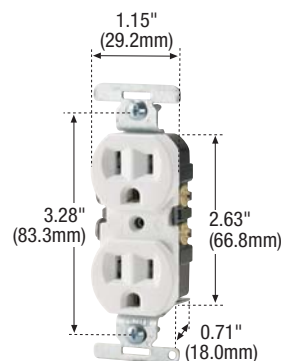

**5270**

## Standard Grade Duplex Receptacles

### FEATURES

- Double wipe ground contacts to ensure long-term ground retention.
- Push-in terminals (8) accept #14 solid copper wire.
- Easy access split circuit break-off tab.
- Combination slot/Phillips head mounting and ground screws ease installation.

### Square Face – Less Strap – Push Wire

Rating A	V	NEMA	Color	Catalog No.
15	125	5-15R	Black	3298BK



**3298**



**5-15R**