

| | | | | | |
|-------------|--|-----------|--|------|--|
| Project | | Catalog # | | Type | |
| Prepared by | | Notes | | Date | |



Sure-Lites

APWR Series

Remote Heads LED Emergency Heads
Wet Location Listed

Typical Applications

Office • Education • Healthcare • Hospitality
• Retail • Industrial • Manufacturing

Interactive Menu

- Order Information page 2
- Photometric Data page 2
- Control Solutions page 2
- Connected Systems page 2
- Product Warranty

Product Certification




Product Features



Top Product Features

- 3.6V, .78W DC long lasting LED heads
- Lamp heads adjust 80° from vertical with 358° rotation
- Universal mounting plate
- Flame-resistant and impact-resistant
- Injection-molded thermoplastic material

Dimensional Details

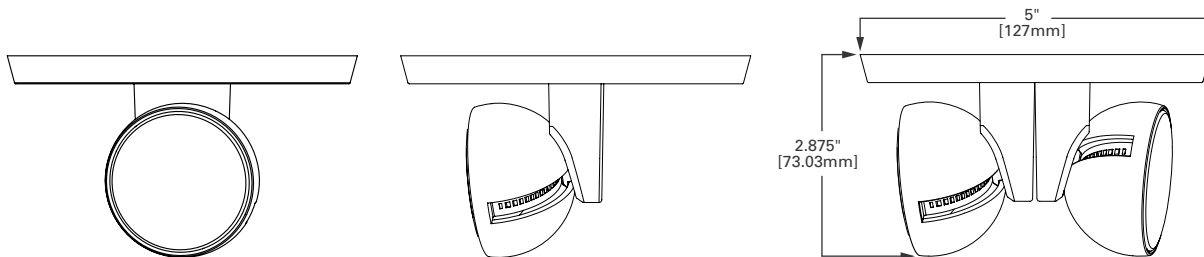

[additional product diagrams](#)


APWR2BK

SAMPLE ORDER NUMBER: **APWR2BK**

Order Information

| Series | Remote Heads | Housing Color | Catalog Numbers |
|--------|-----------------------------------|-----------------------------|---------------------------------------|
| APWR | 1=one LED head 2=two LED heads | _=White BK =Black | APWR1, APWR2, APWR1BK, APWR2BK |

APWR Spacing

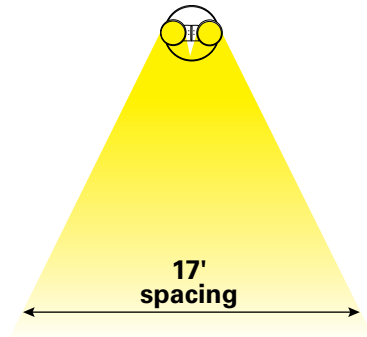

Product Specifications

Electrical

- 3.6V DC Input Voltage

Lampholder/Mounting Plate Construction

- Flame resistant and impact resistant, injection molded thermoplastic
- Lamp heads adjust 80° from vertical with 358° rotation
- Universal mounting plate
- Available in white or black

Code Compliance

- UL 924 Listed
- Wet Location Listed (APWR)
- - (-30 C) to 50 C; (-22 F) to 122 F
- California Energy Code compliant

Head/Lamp Data

- Long Life LED Emergency Heads
- Fully adjustable
- High impact thermoplastic
- Matches housing finish
- 3.6V, .78W DC Long Lasting LED Heads

Warranty

- Five-year warranty