

Commercial Specification Grade Plugs and Connectors

2 Pole, 3 Wire Grounding
NEMA 5-15, 15A 125V
NEMA 6-15, 15A 250V
NEMA 5-20, 20A 125V
NEMA 6-20, 20A 250V
NEMA 7-15, 15A 277V



Vinyl Armored and Rubber Plugs

FEATURES

- Solid brass plug blades are firmly embedded in body.
- Terminal screw clamps are designed to contain wire and prevent binding.
- Terminal screws backed out - ready for wiring.
- Terminals in individual chambers to positively insulate conductors.
- Armored housing automatically grounded.
- Combination slot/Phillips head mounting and terminal screws ease installation with power screwdrivers. (Slot/Robertson screws in Canada where available).

Vinyl Armored Plugs

Rating	Cord		Catalog No.				
A	V/AC	NEMA	Description	Diameter	Color	Plug	Connector
15	125	5-15	Straight	0.25-0.625" (6.35-15.87mm)	Yellow	2867	2887
20	125	5-20	Straight	0.25-0.625" (6.35-15.87mm)	Yellow	2809	2228
15	250	6-15	Straight	0.25-.0625" (6.35-15.87mm)	Yellow	2866	2227
20	250	6-20	Straight	0.25-0.625" (6.35-15.87mm)	Yellow	3809	2229
15	277	7-15	Straight	0.25-0.625" (6.35-15.87mm)	Yellow	2839*	—



*Not NOM

Thermoplastic Rubber Plugs


Rating	Cord		Catalog No.				
A	V/AC	NEMA	Description	Diameter	Color	Plug	Connector
15	125	5-15	Straight	0.25-0.60" (6.35-15.24mm)	Black	1709	222*
15	250	6-15	Straight	0.25-0.60" (6.35-15.24mm)	Black	1711	229†
20	250	6-20	Straight	0.25-0.60" (6.35-15.24mm)	Black	1703	—

* Not NOM

† Not NOM or CSA

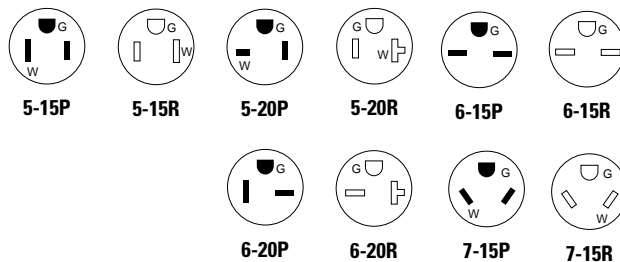

2866



2229



1709



222

INDUSTRIAL
COMMERCIAL
RESIDENTIAL

I-16 STRAIGHT BLADE PLUGS AND CONNECTORS

TESTING & CODE COMPLIANCE

- Listed to UL 498 (file no. E15012).
- CSA Certified to C22.2 no. 42 (file no. 2081 (6221-02)).
- NOM Certified, except as noted.

MATERIAL CHARACTERISTICS

PVC and Thermoplastic Rubber.
Environmental: Meets flammability requirements per UL 94, VO rated except 229.
Temperature Rating: -20°C to 60°C., except #229: -20°C to 70°C.