

SYLVANIA Luminaires

UltraLED™ CCT Selectable Cutoff Wall Pack

Application

The Wall Pack luminaires are environmentally preferable LED alternatives to traditional HID luminaires, offering up to 74% in energy savings. Ideal in place of traditional luminaires, or as new installations, the Wall Pack series is offered in several wattages/lumen packages for illuminating building exteriors, outdoor corridors, walkways, and stairwells.

Benefits and Features

- DLC Premium listing and wattage and lumen selectability provide high energy efficacy and optimize this product for utility rebates
- Integral Photocontrol included
- Optional Emergency Battery Back-up on selected wattages
- Traditional sizes allow seamless replacement of existing luminaires
- IP65 rated body ensures a resilient and long-lasting product
- Up to 120 LPW
- Selectable 3000K, 4000K or 5000K color temperatures
- CRI >80
- Offered in 40, 60, 80 or 120 watts
- Energy savings up to 74%

Electrical

- 120-277V_{AC}
- Power Factor >90%
- THD <20%
- 0-10V dimmable

Rated Life

- 150,000 hours (L₇₀@25°C)

Warranty

- 5-year

Ambient Operating Range


- -40°F to +122°F (-40°C to +50°C)
- +32°F to +122°F (0°C to +50°C) (Emergency Versions)

Item #
Type
Project
Notes
Date

40/60/80W



120W

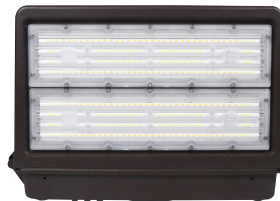

Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
70W HPS	91	40	56%
100W HPS	120	40	67%
100W MH	130	40	69%
150W HPS	170	60	65%
150W MH	188	60	68%
175W MH	210	60	71%
175W MH	210	80	62%
250W MH	290	80	72%
250W HPS	295	80	73%
320W MH	370	120	68%
400W HPS	464	120	74%
400W MH	458	120	74%

Certifications and Listings

- cULus
- FCC
- RoHS
- DLC Premium

Installation

- Luminaire mounts to exterior wall.



Ordering Guide

WALPAKC	5X	/	XXX	XXX	D	8	SC2	/	BZ	/	XX
Product Name	Generation/Size*		Wattage	Voltage	Dimming	CRI	Color Temp		Color/Finish		Options
WALPAKC =	5B, 5C		040 = 40 Watts	UNV = 120-277V	D = 0-10V dimming	8 = >80	SC2 = 3000K, 4000K or 5000K		BZ = Bronze		P = Photocontrol PE = Photocontrol + Emergency Battery Back-up
Cutoff Wall Pack			060 = 60 Watts 080 = 80 Watts 120 = 120 Watts								

*5C = 120W only
5B = 40, 60 or 80W



Ordering Information

Item Number	Ordering Abbreviation	Wattage (W)	Input Voltage (V)	Dimming		CRI	Color Temperature (CCT)	Total Fixture Lumens	LPW	Color	DLC	Option Included
				0-10V	>80							
61833	WALPAKC5B/040UNVD8SC2C1BZ/P	40	120-277	0-10V	>80	>80	3000, 4000, or 5000K	4800	120	Bronze	Premium	Photocontrol
61834	WALPAKC5B/060UNVD8SC2C1BZ/P	60	120-277	0-10V	>80	>80	3000, 4000, or 5000K	7200	120	Bronze	Premium	Photocontrol
61835	WALPAKC5B/080UNVD8SC2C1BZ/P	80	120-277	0-10V	>80	>80	3000, 4000, or 5000K	9600	120	Bronze	Premium	Photocontrol
61841	WALPAKC5C/120UNVD8SC2C1BZ/P	120	120-277	0-10V	>80	>80	3000, 4000, or 5000K	14,400	120	Bronze	Premium	Photocontrol
61836	WALPAKC5B/040UNVD8SC2C1BZ/PE	40	120-277	0-10V	>80	>80	3000, 4000, or 5000K	4800	120	Bronze	Premium	Photocontrol + Emergency Battery Back-up
61837	WALPAKC5B/060UNVD8SC2C1BZ/PE	60	120-277	0-10V	>80	>80	3000, 4000, or 5000K	7200	120	Bronze	Premium	Photocontrol + Emergency Battery Back-up



Physical Information

Lamp Description	Length (inches)	Width (inches)	Height (inches)
40W	14.2	9.3	6.5
60W	14.4	9.3	6.5
80W	14.4	9.3	6.5
120W	14.2	9.3	9.6

40/60/80W

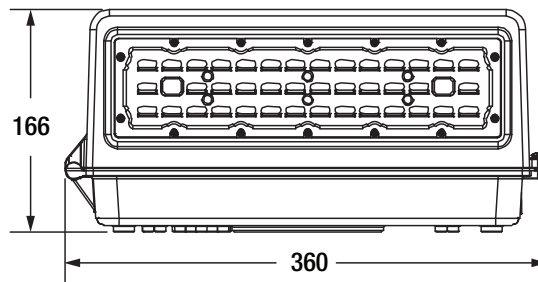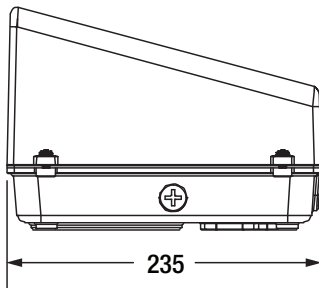

120W

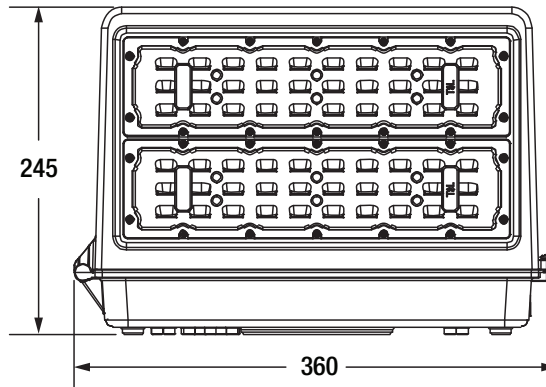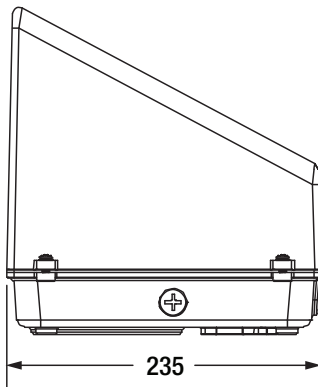

Dimensions in mm

LEDVANCE LLC
200 Ballardvale Street
Wilmington, MA 01887 USA
Phone 1-800-LIGHTBULB (1-800-544-4828)
www.sylvania.com

SYLVANIA and LEDVANCE are registered trademarks.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.

 /sylvania  /sylvania

© 2020 LEDVANCE LLC

Name: _____

Email: _____

Phone: _____

