


# Ordering Information

## 16 Series: Single or Double Set Screw or Crimp Tube Termination

NEMA 3R Rated for Outdoor Use

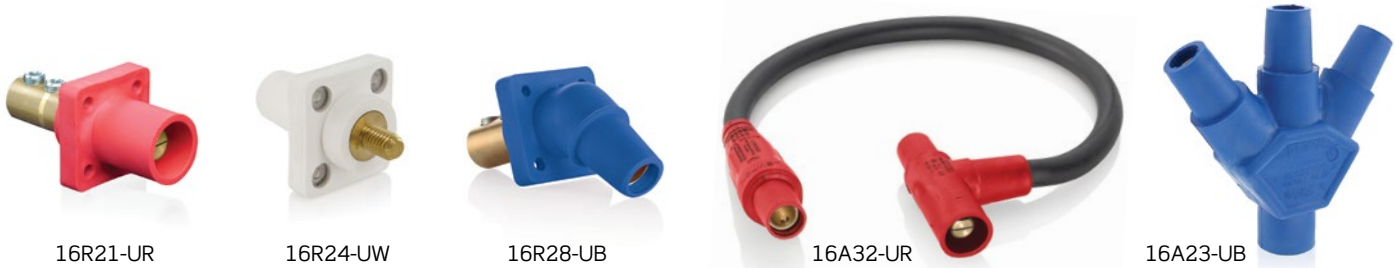

16R21-UR

16R24-UW

16R28-UB

16A32-UR

16A23-UB

### CAM-TYPE PANEL MOUNT RECEPTACLE

Cable Size: 2/0 - 4/0 Max Ampacity: 400A	Double Set Screw Termination ㉔ ㉕				
	Male, 90°	Female, 90°	Male, 45°	Female, 45°	
	16R21-U*	16R22-U*	16R27-U*	16R28-U*	
Cable Size: #2 - 4/0 Max Ampacity: 400A	.75"L Threaded Stud** Termination ㉔ ㉕				
	Male, 90°	Female, 90°	w/microwsitch	Male, 45°	Female, 45°
	16R23-U*	16R24-U*	16RSW-U*	16R29-U*	16R30-U*
Cable Size: #2 - 4/0 Max Ampacity: 400A	1.125"L Threaded Stud** Termination ㉔ ㉕				
	Male, 90°	Female, 90°	Self-Clinching Nut		
	16R23-1U*	16R24-1U*	Male, 90°	Female, 90°	
Cable Size: #2 - 4/0 Max Ampacity: 400A	1.25"L Threaded Stud** Termination - 0.75" Extended Shoulder ㉔ ㉕				
	Male, 90°	Female, 90°			
	16R31-X*	16R32-X*			
Cable Size: #2 - 4/0 Max Ampacity: 400A	Half Round w/Tapped Hole ㉔ ㉕				
	Male, 90°	Female, 90°			
	16R19-U*	16R20-U*			

Replace \* with the following: W (White), E (Black), H (Brown), R (Red), B (Blue), O (Orange), G (Green), Y (Yellow).

\*\*Threaded stud termination type receptacles are available with custom stud lengths, from .75"L to 3.00"L.

Please contact your local sales representative for ordering information and availability.

### TERMINAL CONNECTORS

Cable Size: #2 - 4/0 Max Ampacity: 400A	Bus Bar Mount ®		
	Male Angle	Female Angle	Offset
	16M21-2U*	16F21-U*	16F22-U*

Replace \* with the following: W (White), E (Black), H (Brown), R (Red), B (Blue), O (Orange), G (Green), Y (Yellow).

### COVERS

	Enclosure Male/Female	Caps	
		Male	Female
	16S31-U*	16P21-U*	16P22-U*

Replace \* with the following: W (White), E (Black), H (Brown), R (Red), B (Blue), O (Orange), G (Green), Y (Yellow), CL (Clear).

### CAM-TYPE ADAPTERS

Max Ampacity: 400A	Paralleling Tee ®	Tapping Tee ®	3-Fer ®	Reverse 3-Fer ®
	F-M-M	F-F-M	M-F-F-F	F-M-M-M
	16A21-U*	16A22-U*	16A23-U*	16A26-U*
Max Ampacity: 400A	Double Male ®		Double Female ®	
	16A25-U*		16A24-U*	
Assembled Adapters Cable Size: 4/0 Max Ampacity: 400A	Paralleling Tee ®	Tapping Tee ®	3-Fer ®	Reverse 3-Fer ®
	F-M-M	F-M-F	M-F-F-F	F-M-M-M
	16A31-U*	16A32-U*	16A33-U*	16A36-U*

Replace \* with the following: W (White), E (Black), R (Red), B (Blue), G (Green).

Note: Some items may require extended lead times; always consult with your local sales representative for current availability.