



Industrial Specification Grade Hart-Lock® Locking Devices

2-Pole, 3-Wire Grounding
NEMA L6-15

15A 250V NEMA L6-15 Industrial Locking Devices


Locking Receptacles

FEATURES

- Glass reinforced nylon body and face.
- One piece brass contacts offer superior performance and minimum heat rise.
- Back and side wire terminal clamps for easy secure wiring.
- Duplex receptacles feature a break off tab for split circuit wiring.

Rating A	V/AC	NEMA	Description	Color	Catalog No.	
					Single	Duplex
15	250	L6-15	Industrial	Black	CWL615R	6580
			Isolated Ground	Orange	IGL615R*	IG6580*

*Not CSA certified

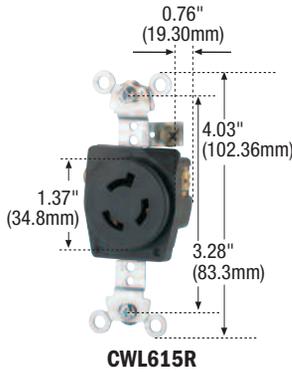

Safety Grip™ Locking Plugs & Connectors

FEATURES

- Nylon construction.
- Neoprene gasket seals cord hole from dust and debris.
- Dual range cord grip for solid cord clamping.
- Back wire terminal clamps for easy secure wiring.
- Individual wiring compartments with tapered channel for easy insertion of wires.
- Clear cover over wiring compartments allows easy inspection of wiring terminations.

Rating A	V/AC	NEMA	Description/Cord Dia.	Color	Catalog No.	
					Plug	Connector
15	250	L6-15	Industrial: 0.250"-0.656" (6.4mm-16.7mm)	Black & White	CWL615P	CWL615C
			Angle: 0.300"-0.656" (7.62mm-16.7mm)	Black & White	CWL615PAN	—



N-5 Locking Devices

TESTING & CODE COMPLIANCE

- Listed to UL 498, file no: E2369 (Receptacles).
- cUL Listed, file no: E3663 (Plugs & Connectors).
- UL Listed to Federal Spec. WC-596-F (Plugs & Connectors).
- CSA Certified to C22.2 no. 42 (file no. LR7087) except as noted.

MATERIAL CHARACTERISTICS

- Receptacles:
Glass filled Nylon.
- Plugs & Connectors:
Nylon.
- Environmental:
Flammability per UL 94: Receptacles: VO rated; Plugs & Connectors: V2 rated.
- Temperature Rating:
Receptacles: -40°C to 115°C. Plugs & Connectors: -40°C to 75°C.

