


PERFORMANCE

Watts	7W
Color Temp	4000K
Lumens	900 lm
Efficacy	129
Color Accuracy	80 CRI
L70 Lifespan	50,000 Hours
Input Voltage	Type B - 120-277 / Type A - dependant on the
Power Factor	>0.9
Flicker	N/A
THDi	20

DIMENSIONS

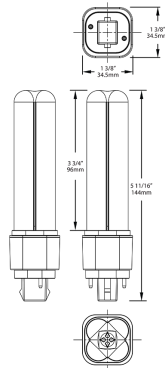

Weight: 0.2 lbs

TECHNICAL SPECIFICATIONS

Performance

Product Type

Compacts

Input Wattage
7W

Lumens (Nominal)
900 Lm

Efficacy
129 Lm/W

L70 Lifespan
50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Wattage Equivalency
13W/18W G24d & G24q

LED Characteristics

Color Accuracy (CRI)
80

Color Temperature
4000K

Electrical

THD
20%

Power Factor
>0.9

Dimmable
Non-Dim

Input Voltage
120-277 Type B (Type A dependent on ballast)

Operating Frequency
50/60Hz

Operating Temperature
-20°C - 45°C (-4°F - 113°F)

Construction

Bulb Shape
PLC-O

Enclosure Material
Polycarbonate

Housing Finish
White

Lens Finish
Frosted

Base Type
2-Pin G24d

Optical

Beam Angle
360°
