


PERFORMANCE

| | |
|----------------|--|
| Watts | 9W |
| Color Temp | 3500K |
| Lumens | 1,250 lm |
| Efficacy | 139 |
| Color Accuracy | 80 CRI |
| L70 Lifespan | 50,000 Hours |
| Input Voltage | Type B - 120-277 / Type A - dependant on the |
| Power Factor | >0.9 |
| Flicker | N/A |
| THDi | 20 |

DIMENSIONS

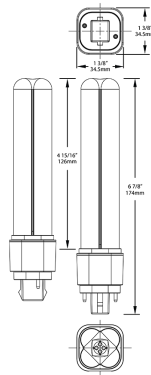

Weight: 0.2 lbs

TECHNICAL SPECIFICATIONS

Performance

Product Type

Compacts

Input Wattage
9W

Lumens (Nominal)
1,250 Lm

Efficacy
139 Lm/W

L70 Lifespan
50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Wattage Equivalency
26W/32W G24d & G24q

LED Characteristics

Color Accuracy (CRI)
80

Color Temperature
3500K

Electrical

THD
20%

Power Factor
>0.9

Dimmable
Non-Dim

Input Voltage
120-277 Type B (Type A dependent on ballast)

Operating Frequency
50/60Hz

Operating Temperature
-20°C - 45°C (-4°F - 113°F)

Construction

Bulb Shape
PLC-O

Enclosure Material
Polycarbonate

Housing Finish
White

Lens Finish
Frosted

Base Type
2-Pin G24d

Optical

Beam Angle
360°

Installation

Installation Method
UL Type A with Magnetic Ballasts & UL Type B (Dual Mode)

Burning Position
Universal
