


PERFORMANCE

Watts	5W
Color Temp	3500K
Lumens	600 lm
Efficacy	109.1 lm/W
Color Accuracy	80 CRI
L70 Lifespan	50,000 Hours
Type	Constant Current
120V	
208V	
240V	
277V	
Input Watts	5.5W

DIMENSIONS

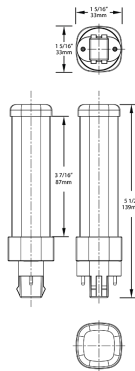

Weight: 0.2 lbs

TECHNICAL SPECIFICATIONS

Performance

Product Type
Compacts

Input Wattage
5.5W

Lumens (Nominal)
600 Lm

L70 Lifespan
50,000-Hour LED lifespan based on IES LM-70 results

Wattage Equivalency
13W Gx23

LED Characteristics

Color Accuracy (CRI)
80

Color Temperature
3500K

Electrical

THD
<20%

Power Factor
>0.9

Dimmable
Non-Dim

Input Voltage
120-277 Type B (Type A dependent on ballast)

Operating Frequency
50/60Hz

Construction

Bulb Shape
PLS-Horizontal

Enclosure Material
Polycarbonate

Housing Finish
White

Lens Finish
Frosted

Base Type
2-Pin Gx23-2

Optical

Beam Angle
110°

Installation

Installation Method
UL Type A with Magnetic Ballasts & UL Type B (Dual Mode)

Burning Position
Horizontal

Other

Technology EQ
CFL

Warranty

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Compliance

Safety Listing

UL Listed, UL Classified

Environment/Fixture Rating

Damp / Open

RoHS

Mercury and UV free. RoHS-compliant components.

FCC

Complies with Part 15 of the FCC Rules

Certification Model Number

T10208(PLS-5-H-835-HYB)
