


Construction grade receptacles

Combines safe, rugged, reliable performance with ease-of-installation

Arrow Hart construction grade receptacles are designed to provide a dependable, long lasting user experience while increasing the speed and efficiency of installation

Construction grade 5262 & 5362 series features & benefits

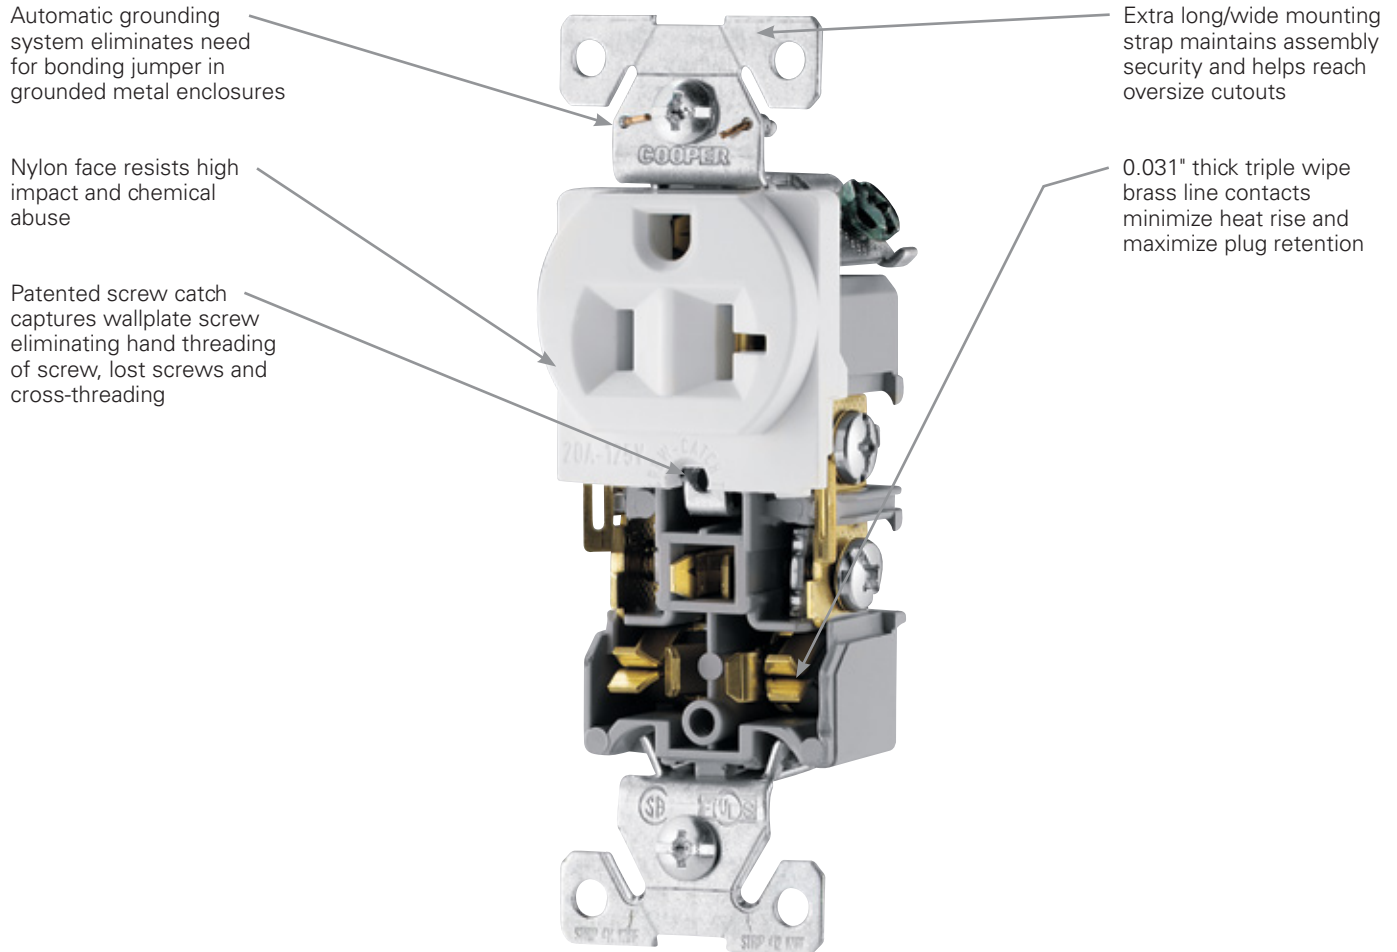

Additional features & benefits

- Available in 15A & 20A duplex configurations, including tamper resistant and ArrowLink modular styles
- Convenient built-in #10 and #12 AWG wire strippers
- Tri-combo head terminal and mounting screws



Compliances, specifications and availability are subject to change without notice.

www.eaton.com
www.eaton.com/arrowhart


Commercial grade straight blade receptacles

Product description


2-pole, 3-wire grounding
15A, 125V/AC
20A, 125V/AC
NEMA 5-15R, 5-20R




7750



TR7756



TR7735



TR775

USB charging station



USB rating	A	V/DC	Description	Color suffix	Catalog no.
5.0 total	5		USB charging station, wire leads	BK, LA, V, W	□ 7750__

USB charger with tamper resistant receptacles



Rating	A	V/AC	Amps	V/DC	Description	Color suffix	Catalog no.
15	125	3.1	5		USB charger with TR duplex receptacle, wire leads	A, B, BK, GY, LA, V, W	□ TR7755__
20	125	3.1	5		USB charger with TR duplex receptacle, wire leads	A, B, BK, GY, LA, V, W	□ TR7756__

Tamper resistant combination LED wallbox nightlight with receptacle



Rating	A	V/AC	NEMA	Description	Color suffix	Catalog no.
15	125	5-15R		Nightlight with single receptacle, back & side wire	A, BK, LA, V, W	□ TR7735
20	125	5-20R		Nightlight with single receptacle, back & side wire	A, BK, LA, V, W	□ TR7736

Tamper resistant clock hanger receptacles



Rating	A	V/AC	NEMA	Description	Color	Catalog No.	
15	125	5-15R		Single clock hanger receptacle side wire	W	□ TR775W	•
				Recessed duplex receptacle, push wire & side wire	W	□ TR780W	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)

A	B	BK	GY	LA	V	W
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Ivory)	(White)

Specification information: USB commercial receptacles & USB charging station: A-34

Compliances, specifications and availability are subject to change without notice.




Commercial grade receptacles specification & performance data

Commercial grade receptacles

Product description

2-pole, 3-wire grounding
15A, 125V/AC;
20A, 125V/AC
NEMA 5-15, 5-20

Device Type	Commercial grade USB duplex receptacle:  TR7755, TR7756	Commercial grade USB charging station: 7750
Wiring Type	Wire Leads	Wire leads
Testing & code compliance	• cULus Listed to UL498 and UL1310, File no. E15058	• UL Listed to UL 1310, File no. E362460
Environmental specifications	Flammability: Meets UL94 requirements; 5V rated Temperature rating: -20°C to 60°C (-4°F to 140°F)	Flammability: Meets UL94 requirements; 5V rated Temperature rating: -20°C to 60°C (-4°F to 140°F)
Electrical specifications		
AC output	Dielectric voltage: Receptacle withstands 2000V per UL498 Current interrupting: Yes, at full-rated current Temperature rise: Receptacle - Max. 30°C (86°F) after 100 cycles of overload @ 150% of rated current (DC)	Dielectric voltage: N/A Current interrupting: N/A Temperature rise: N/A
DC output	Switching frequency: Typical 140 kHz Output voltage: Nominal 5V (+/- 10%) Protection: Current limiting Output current: Constant current maximum 2.1A	Switching frequency: Typical 1.8 kHz to > 25 kHz, load dependent Output voltage: Nominal 5V (+/- 5%) Protection: Current limiting Output current: Constant current maximum 2.5A per dual port
AC input	Input current: 120V/AC, 60Hz, 0.25A max	Input current: 120V/AC, 60Hz, 0.45A max
Mechanical specifications	Terminations: Device can be wired using #14 or #12 AWG wires, three 6" pre-stripped #14 AWG wire leads for line, neutral and #12 AWG ground Voltage ratings: Permanently marked on device	Terminations: Device can be wired using #14 or #12 AWG wires, three 6" pre-stripped #14 AWG wire leads for line, neutral and #12 AWG ground Voltage ratings: Permanently marked on device
Materials	Top housing: PC Bottom housing: PC Strap: 0.045" thick galvanized steel, zinc plated Auto ground clip: Phosphor bronze Line contacts: 0.03" thick brass Ground contact: Riveted Terminal screws: N/A Ground screw: N/A	Top housing: PC Bottom housing: PC Strap: 0.045" thick steel, zinc plated Auto ground clip: Phosphor bronze Line contacts: N/A Ground contact: N/A Terminal screws: N/A Ground screw: N/A