


SCREW-SHOOTER ACCESSORIES


BIT HOLDERS • SOCKETS • EXTENSIONS • BITS AND FINDERS



DESCRIPTION	SIZE	CATALOG NUMBER
3" Magnetic Bit Holder w/ cap		48-32-3025
3" Magnetic Bit Tip Holder Stainless Steel**		48-32-3070
3" Magnetic Bit Holder		48-32-3065
2" Non-Mag. Bit Holder		48-32-3050
2" x 1/4" Sq. Socket Driver		48-32-2050
4" x 1/4" Sq. Socket Driver		48-32-2055
Hex Sockets Only Magnetic	1/4"	49-66-3000
	5/16"	49-66-3010
	3/8"	49-66-3020
1 Pc. Hex Socket Ext. Non-Magnetic	5/16"	49-66-3015
1 Pc. Hex Socket Extension Magnetic	1/4"	49-66-3006
	5/16"	49-66-3016
	3/8"	49-66-3026
Bit and Finder Combinations* (Slotted Screws) 3-1/2" Long	6F-8R	48-30-2600
	8F-10R	48-30-2625
	10F-12R	48-30-2650
	12F-14R	48-30-2675
	14F-16R	48-30-2700


* Finders locate screwheads—improve bit driving.

POWER BITS FOR 1/4" DRIVE SYSTEMS



DESCRIPTION	SCREW SIZE	CATALOG NUMBER
1-15/16" Long Bits for Slotted Head Screws	6F-7R	48-30-0500
	8F-10R	48-30-0505
	10F-12R	48-30-0510
	12F-14R	48-30-0515
2" Long Phillips Bit	#1	48-30-1510
	#2	48-30-1520
	#3	48-30-1500
3" Long Phillips Bit	#2	48-30-1525


INSERT SOCKET AND ADAPTER



DESCRIPTION	SHANK	CATALOG NUMBER	FOR USE WITH
Magnetic Bit Holder	1/4"	48-32-3055	48-32-1600*
1/4" Socket Adapter	1/4"	48-32-2060	48-32-1600*


* For use with the 48-32-1600 Hand-held Driver.

INSERT BITS




DESCRIPTION	SIZE	CATALOG NO.
Phillips 1" Long	#0	48-32-1020
	#1	48-32-1030
	#1 (QTY. 10)	48-32-1033
	#1 (QTY. 25)	48-32-1031
	#1 (QTY. 50)	48-32-1032
	#2	48-32-1040
	#2 (QTY. 10)	48-32-1043
	#2 (QTY. 25)	48-32-1041
	#2 (QTY. 50)	48-32-1042
	#2	48-32-1050
Phillips Bit in Quantities of 10 Come Packaged in a Reusable Vinyl Pouch. See below.	#2 (QTY. 10)	48-32-1053
	#2 (QTY. 25)	48-32-1051
	#2 (QTY. 50)	48-32-1052
	#3	48-32-1070
#3 (QTY. 10)	48-32-1073	
Phillips 3-1/2" (90 mm) Long	#2	48-32-1060
Slotted Screw Insert Bits 1" Long	0F-1R	48-32-1300
	3F-4R	48-32-1320
	6F-8R	48-32-1330
	5F-6R	48-32-1340
	8F-10R	48-32-1360
	10F-12R	48-32-1370
	12F-14R	48-32-1380
Slotted 1-3/4" (45 mm) Long	8F-10R	48-32-0420
Allen Head 1" Long	5/64"	48-32-1400
	3/32"	48-32-1420
	7/64"	48-32-1440
	1/8"	48-32-1460
	9/64"	48-32-1480
Torx® 1" Long <i>Torx® is a registered tradename of CAMCAR.</i>	T10	48-32-1510
	T15	48-32-1515
	T20	48-32-1520
	T25	48-32-1525
	T30	48-32-1530
	T40	48-32-1540
Pozi driv®	#1	48-32-1120
	#2	48-32-1125
Frearson 1-1/8" Long (Reed & Prince)	#1	48-32-1110
	#2	48-32-1115
Square Drive (Robertson) 1" Long	#0	48-32-1201
	#1	48-32-1205
	#2	48-32-1210
	#2 (QTY. 10)	48-32-1211
#3	48-32-1215	
Magnetic Insert Socket	1/4"	49-66-0800

Reduced Diameter Insert Bits Ideal for Drywall.



ACCESSORIES



HEX SOCKET EXTENSION MAGNETIC

49-66-3005

Set includes one each of:
49-66-3006 1/4" Magnetic Socket.
49-66-3016 5/16" Magnetic Socket.
49-66-3026 3/8" Magnetic Socket.

NEW!



7-PIECE SCREWDRIVER AND 3-1/2" SLOTTED POWER BIT SET

48-30-0102

Includes No. 1, 2, & 3 Phillips 1/4" hex bits, 48-30-2601 (6-7x3-1/2" slotted bit B), 48-30-2626 (8-10x3-1/2" slotted bit), 48-30-2651 (10-12x3-1/2" slotted bit) and 48-30-2651 (10-12x3-1/2" slotted bit). For use on cordless driver/drills and power screwdrivers.



NEW!

3-PIECE 3-1/2" SLOTTED POWER BIT SET

48-30-2706

Includes a 48-30-2601 (6-7x3-1/2" slotted bit B), 48-30-2626 (8-10x3-1/2" slotted bit) and 48-30-2651 (10-12x3-1/2" slotted bit). For use on cordless driver/drills and power screwdrivers.



PHILLIPS INSERT BITS

48-32-1033

10 Pack of #1 Phillips Insert Bits.

48-32-1043

10 Pack of #2 Phillips Reduced Shank Insert Bits.

48-32-1053

10 Pack of #2 Phillips Insert Bits.

48-32-1073

10 Pack of #3 Phillips Insert Bits.

SQUARE DRIVE INSERT BITS

48-32-1211

10 Pack of #2 Square Drive Insert Bits.



SCREWDRIVER BIT SET

48-30-0200

Includes 4 Phillips, 5 slotted, 5 hex, 4 square recess, 6 Torx®, 2 Pozi driv® bits, 1/4" adapter, magnetic bit holder and 1/4" hex driver.



HAND SCREWDRIVER
48-32-1600




MAGNUM® DRYWALL SCREW-SHOOTER



6749-1

5.5 AMPS
VARIABLE SPEED
0-2500 RPM

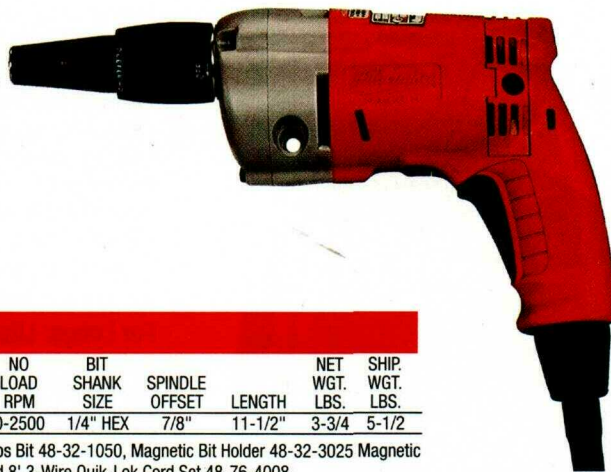

SPECIFICATIONS

CATALOG NUMBER	VOLTS AC ONLY	AMPS	NO LOAD RPM	BIT SHANK SIZE	SPINDLE OFFSET	LENGTH	NET WGT. LBS.	SHIP. WGT. LBS.
6749-1	120	5.5	0-2500	1/4" HEX	7/8"	11-1/2"	3-3/4	5-1/2

STANDARD EQUIPMENT: #2 Phillips Bit 48-32-1050, Magnetic Bit Holder 48-32-3025 Magnetic Bit Holder Locator 49-26-1040 and 8' 3-Wire Quik-Lok Cord Set 48-76-4008.

TRIGGER SPEED CONTROL REVERSING MODEL

Powerful MILWAUKEE Built Motor Provides Greater Torque • All Ball and Roller Bearing Construction • Comfortable Two Finger Trigger • Four Position Hand Grip For Any Application

- **Snap-Action Positive Drive Clutch**
Prevents tip-to-tip engagement of clutch jaws at the beginning and at the end of a screw driving cycle. This reduces clutch wear, and when depth sensing nosepieces are used, greatly prolongs clutch life.
- **Quiet Operation Fan Design**
- **Lockable Trigger Switch**
- **Removable Brush Cartridge System**
Change brushes in less than one minute anywhere, with only a screwdriver.
- **3-Wire Quik-Lok® Cord Sets**
For fast secure attachment. 8' cord 48-76-4008 is standard equipment. 25' cord 48-76-4025 is also available.



GENERAL PURPOSE SCREW-SHOOTER KIT

6767-6 (KIT)

DOUBLE INSULATED

5.0 AMPS
VARIABLE SPEED
0-2500 RPM, INCLUDES THE FOLLOWING:
STEEL CARRYING CASE, SLOTTED BIT AND FINDER SET, PKG. OF 10 #2 PHILLIPS INSERT BITS, HEX SOCKET SET AND BELT CLIP




49-26-1081 Tek® Locator Assembly




49-26-1035 Drywall Pop Off Locator




49-66-3016 5/16" Magnetic Hex Socket



48-32-3070 Stepped Magnetic Insert Bit Holder



48-32-1050 #2 Phillips Insert Bit



30-37-0055 Nose Guide



48-67-0115 Belt Clip Kit

TRIGGER SPEED CONTROL REVERSING MODEL

Complete Screwdriver Package For Decking, Assembling And Drywall Projects. For The Professional Application Of Drywall, Self-Drilling/Tapping Fasteners (TEKS®), Wood And Sheet Metal Screws (TEKS Registered trademark of Illinois Tool Works, Inc.)

- **Snap-Action Drive Clutch**
- **Quiet Operation Fan Design**
- **Pop-Off Locator Nose Maintains Depth Setting When Removed And Reattached**
- **Triple Sealed Output Shaft**
- **Non-Marring Locators**
- **Powerful MILWAUKEE Built Motor**
- **Minimum Offset For Close Quarter Work**
- **Engineered For Balanced Design**
- **Impact Resistant, Non-Conductive Glass Reinforced Nylon Motor Housing And Handle**
- **Lightweight Die Cast Gear Case And Diaphragm**
- **Self-Stopping Brush Carbons**
- **Lockable Trigger Switch**
- **2-Wire Quik-Lok® Cord* Sets**
Quick detachment from tool for tangle free carrying and storage. Instant field repair. 2-wire, 10'-16 gauge rubber cord 48-76-5010. 25' cord 48-76-5025 is also available.

SPECIFICATIONS

CATALOG NUMBER	VOLTS AC ONLY	AMPS	NO LOAD RPM	BIT SHANK SIZE	SPINDLE OFFSET	LENGTH W/TEK LOCATOR	LENGTH W/DRYWALL LOCATOR	NET WGT. LBS.	SHIP. WGT. LBS.
6767-6	120	5.0	0-2500	1/4" HEX	3/4"	10-1/2"	11-3/4"	3-5/8	13

STANDARD EQUIPMENT FOR 6767-6 - 49-26-1035 and 49-26-1081 Drywall and Tek's Pop Off Locators, 5/16" Magnetic Hex Socket, Magnetic Insert Bit Holder, #2 Phillips Insert Bit, Belt Clip Kit and 10' 2-Wire Quik-Lok Cord Set 48-76-5010, Slotted Bit and Finder Set 48-30-2705, Package of 10-#2 Phillips Insert Bits 48-32-1053, Hex Socket Set 49-66-3005 and Steel Carrying Case 48-55-0711.

* 2-Wire Quik-Lok Cord is not compatible with previous 3-Wire Quik-Lok configurations.

DRYWALL SCREW-SHOOTERS

ELECTRONICS

6758-6 **DOUBLE INSULATED**

VARIABLE SPEED 0-4000 RPM

- 10' Rubber-Jacketed Cord With Separate Strain Relief
- Snap Action Clutch For Longer Clutch Life And Quiet Operation



6755-1 **DOUBLE INSULATED**

VARIABLE SPEED 0-4000 RPM

- 10', 2-Wire 16 Gauge Quik-Lok® Cord
- Snap Action Clutch For Longer Clutch Life And Quiet Operation



6747-1 **DOUBLE INSULATED**

VARIABLE SPEED 0-2500 RPM

- For framing Applications
- Snap Action Clutch
- 10' Rubber-Jacketed Cord With Separate Strain Relief



30-37-0046 Nose Guide

SPECIFICATIONS

CATALOG NUMBER	VOLTS AC ONLY	AMPS	NO LOAD RPM	BIT SHANK SIZE	SPINDLE OFFSET	LENGTH	NET WGT. LBS.	SHIP. WGT. LBS.
6758-6	120	5.0	0-4000	1/4" HEX	3/4"	11-3/8"	3-1/4	5
6755-1	120	5.0	0-4000	1/4" HEX	3/4"	11-3/8"	3-1/4	5
6747-1	120	5.0	0-2500	1/4" HEX	3/4"	11-3/4"	3-5/8	5

STANDARD EQUIPMENT: FOR ALL MODELS - #2 Phillips Bit 48-32-1050, Magnetic Bit Holder 48-32-3065, Locator Assembly 49-26-1035 and Belt Clip 48-67-0115.

TRIGGER SPEED CONTROL REVERSING POWERFUL 5 AMP MILWAUKEE BUILT MOTOR

All Ball and Roller Bearings • Minimum Offset for Close Quarter Work


- Conveniently Located, Sealed Long-Life Reversing Switch
- Self-Stopping Long-Life Brushes
- Equipped With Lockable Trigger Switch
- Lightweight Die Cast Diaphragm And Gear Case
- Triple Sealed Output Spindle And Sealed Gear Case
- Impact Resistant, Lightweight, Glass Reinforced Nylon Motor Housing And Handle
- Slim Profile Pop-Off Locator Nose Maintains Depth Setting When Removed And Reattached
- Quiet Operation Fan Design
- High-Strength Belt Clip

6755-1 FEATURE

- **2-Wire Quik-Lok® Cord* Sets** Quick detachment from tool for tangle free carrying and storage. Instant field repair. 2-wire, 10'-16 gauge rubber cord 48-76-5010. 25' cord 48-76-5025 is also available.

* 2-wire Quik-Lok Cord is not compatible with previous 3-Wire Quik-Lok configurations.

ACCESSORIES

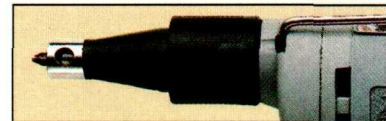

LOCATOR
49-26-1035

BELT CLIP
48-67-0115

TOOL HOLSTER
49-17-0200 Fits all screw-shooters.

STEEL CARRYING CASE WITH TRAY
48-55-0711 For all screw-shooters 13-1/2" long, 6" high, 8-3/4" wide.



SPECIAL SCREW-SHOOTERS



6583-1

DOUBLE INSULATED
5.0 AMPS
VARIABLE SPEED
0-1000 RPM



6783-1

DOUBLE INSULATED
5.0 AMPS
VARIABLE SPEED
0-2500 RPM



VARIABLE TRIGGER SPEED CONTROL, REVERSING MODELS

Powerful MILWAUKEE Built 5 Amp Motor

- **2-Wire Quik-Lok Cord Set**
- **Quiet Operation Fan Design**

■ **Simplified Adjustable Torque Release Clutch**

Torque output is easily changed externally by turning adjustment collar which positively holds setting. Clutch disengages and driving action stops when pre-set torque is reached.

■ **Adjustable Torque**

6583-1 10 – 120 in./lbs.
6783-1 10 – 90 in./lbs.

■ **Quick Release Bit Holding Mechanism**

■ **No Bit Guide Required**

■ **2-Wire Quik-Lok® Cord* Sets**

Quick detachment from tool for tangle free carrying and storage. Instant field repair. Tools come with 2-wire, 10'-16 gauge rubber cord No. 48-76-5010. A 25' cord No. 48-76-5025 is also available.

*2-Wire Quik-Lok Cord is not compatible with previous 3-Wire Quik-Lok configurations.

■ **6583-1 Capacity:**

- 1/4" machine screws and nuts
- 1/4" thread cutting screw
- 5/16" sheet metal screw
- Soft wood with pilot hole – to 5/16" Lag
- Soft wood without pilot hole – to #16
- Hard wood with pilot hole – to #16
- Hard wood without pilot hole – to #12

■ **6783-1 Capacity:**

- 1/4" self-drilling screw in 1/4" cold rolled steel
- #12 self-drilling screw in 1/2" cold rolled steel
- #12 wood screw
- 1/4" thread cutting screw
- 5/16" sheet metal screw
- 1/4" machine screw

SPECIFICATIONS

CATALOG NUMBER	VOLTS AC ONLY	AMPS	NO LOAD RPM	BIT SHANK SIZE	SPINDLE OFFSET	LENGTH	NET WGT. LBS.	SHIP. WGT. LBS.
6583-1	120	5.0	0-1000	1/4" HEX	3/4"	11-1/2"	4	5-1/2
6783-1	120	5.0	0-2500	1/4" HEX	3/4"	11-1/2"	4	5-1/2

STANDARD EQUIPMENT FOR 6583-1 – 6F-8R Bit and Finder No. 48-30-2600, 10F-12R Bit and Finder No. 48-30-2650, #2 Phillips Insert Bit No. 48-32-1050, Non Mag. Bit Holder No. 48-32-3050 and Belt Clip Kit No. 48-67-0115. **FOR 6783-1** – 5/16" Hex Socket Extension No. 49-66-3016 and Belt Clip Kit No. 48-67-0115.

SPECIAL SCREW-SHOOTERS

ELECTRONICS


6798-6 **DOUBLE INSULATED**
SPECIAL SCREW-SHOOTER
VARIABLE SPEED 0-2500 RPM
INCLUDES 2-WIRE, 10' RUBBER JACKETED CORD WITH SEPARATE STRAIN RELIEF

30-37-0055
 Nose Guide



6793-1
HIGH TORQUE MAGNUM®
SCREW-SHOOTER 0-2000 RPM
INCLUDES 3-WIRE, 8' QUIK-LOK CORD



6794-1
MAGNUM® SCREW-SHOOTER
0-2500 RPM
INCLUDES 3-WIRE, 8' QUIK-LOK CORD

TRIGGER SPEED CONTROL REVERSING, POWERFUL MILWAUKEE BUILT MOTOR

All Ball and Roller Bearings • For Driving Self-Drilling/Tapping TEKS® Fasteners

TEKS Registered Trademark of Illinois Tool Works, Inc.

FOR MODEL 6798-6

- **Snap-Action Drive Clutch**
Engages when pressure is applied. Driving action stops and clutch disengages when pressure is released or when locator contacts work surface. Depth control is adjustable in increments of 1/64" from outside of tool.
- **Non-Marring Locators**
- **Lightweight Die Cast Diaphragm And Gear Case**
- **New, Quiet Operating Fan Design**
- **Quiet, Long Life Operation**

FOR MODEL 6793-1

- **Lower RPM**
Provides for reduced screw point burning and 25% more torque than Model 6794-1 for fastening 1-1/8" plywood and other compressed decking materials to 1/8" steel joists using self-drilling/tapping fasteners.

EXCLUSIVE MAGNUM® FEATURES:

- **Powerful 5.5 AMP Motor**
- **Removable Brush Cartridge System**
Change brushes in less than one minute, anywhere, with only a screwdriver. Self-stopping brushes. Instant brush replacement by using spares stored in cartridge system.



- **Three-Wire Quik-Lok® Cord Sets**
 Quick detachment from tool for tangle free carrying and storage. Instant field repair. Quik-Lok with twist lock plug cord sets also available.

3-Wire Quik-Lok® Cord Sets		NEMA Plug Type
48-76-4008	3-Wire 8' Quik-Lok	5-15P
48-76-4025	3-Wire 25' Quik-Lok	5-15P
3-Wire Quik-Lok® Cord Sets With Twist Lock Plug		
48-76-4108	3-Wire 8' Quik-Lok W/Twist Lock Plug	L5-20P
48-76-4125	3-Wire 25' Quik-Lok W/Twist Lock Plug	L5-20P

SPECIFICATIONS

CATALOG NUMBER	VOLTS AC ONLY	AMPS	NO LOAD RPM	BIT SHANK SIZE	SPINDLE OFFSET	LENGTH	1/4" COLD ROLLED STEEL	1/2" COLD ROLLED STEEL	NET WGT. LBS.	SHIP. WGT. LBS.
6798-6	120	5.0	0-2500	1/4" HEX	3/4"	10-3/4"	1/4" SCREW	NO. 12 SCREW	3-3/4	5-1/2
6793-1	120	5.5	0-2000	1/4" HEX	7/8"	10-1/2"	1/4" SCREW	NO. 12 SCREW	3-3/4	5-1/2
6794-1	120	5.5	0-2500	1/4" HEX	7/8"	10-1/2"	1/4" SCREW	NO. 12 SCREW	3-3/4	5-1/2

STANDARD EQUIPMENT FOR 6798-6: Tek Locator Assembly 49-26-1081, 5/16" Hex One Piece Socket Extension 49-66-3016, Belt Clip Kit 48-67-0115 and 2-Wire, 10' Rubber Jacketed Cord.
FOR 6793-1 AND 6794-1: 5/16" Hex One Piece Socket Extension 49-66-3016, 1/4" Locator 49-26-0250, 5/16" Locator 49-26-0312, 3/8" Locator 49-26-0375 and 3-Wire, 8' Quik-Lok Cord Set 48-76-4008.