




IMSA 19-1 Solid Conductor Product Specifications

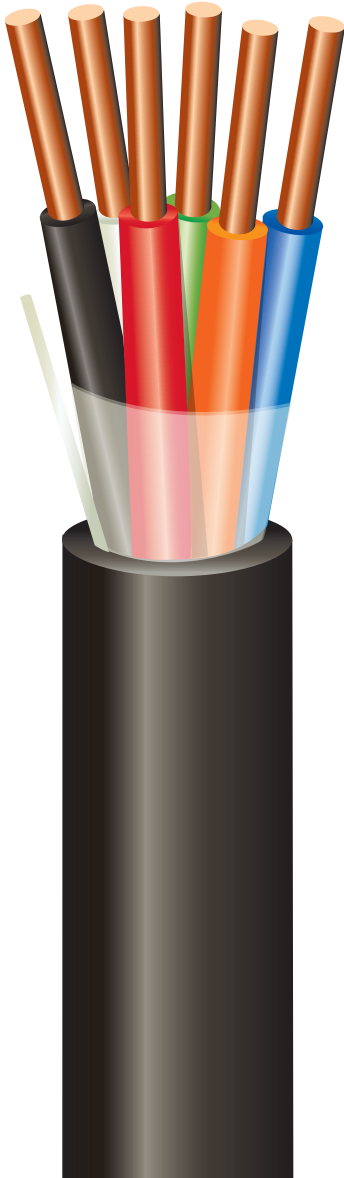

Specifications		Put-Ups
Conductor - Solid Bare Copper per ASTM B-3 Insulation 14 AWG - .025" (.635mm) PE 12 AWG - .030" (.762mm) PE	Jacket - PVC Voltage Rating - 600 V Temp. Rating - 75°C	Standard Reels 2,500' and 5,000' <i>Other lengths available. Please consult your factory represen- tative for availability.</i>

NO. OF COND	OUTER JKT THICKNESS		NOMINAL O.D.		WEIGHT lbs. / 1M'
	INCH	mm	INCH	mm	
14 AWG					
2	.045	1.143	.322	8.18	58
3	.045	1.143	.339	8.61	75
4	.045	1.143	.369	9.37	94
5	.045	1.143	.402	10.21	113
7	.045	1.143	.435	11.05	146
9	.060	1.524	.538	13.67	186
10	.060	1.524	.580	14.73	220
12	.060	1.524	.597	15.16	254
14	.060	1.524	.626	15.90	325
15	.060	1.524	.660	16.76	311
16	.060	1.524	.660	16.76	325
19	.060	1.524	.694	17.63	375
20	.060	1.524	.729	18.52	395
21	.060	1.524	.729	18.52	413
25	.060	1.524	.808	20.52	478
26	.060	1.524	.808	20.52	501
12 AWG					
2	.045	1.143	.376	9.55	58
3	.045	1.143	.397	10.08	75
4	.045	1.143	.434	11.02	94
5	.045	1.143	.475	12.07	113
7	.045	1.143	.514	13.06	146
9	.060	1.524	.634	16.10	186
10	.060	1.524	.688	17.48	220
12	.060	1.524	.709	18.01	254
16	.060	1.524	.787	19.99	325
19	.060	1.524	.829	21.06	395
20	.080	2.03	.913	23.19	631
21	.080	2.03	.913	23.19	652
25	.080	2.03	1.010	25.65	760

www.multicominc.com

Multicom, Inc.
 Ph: 800-423-2594
 Fax: 407-339-0204
 Email: multicom@multicominc.com