



Commercial Specification Grade Plugs and Connectors

2 Pole, 2 Wire Non-Grounding
NEMA 1-15, 15A 125V

INDUSTRIAL
COMMERCIAL
RESIDENTIAL





I-17 STRAIGHT BLADE PLUGS AND CONNECTORS

TESTING & CODE COMPLIANCE

- Listed to UL 498 (file no. E15012).
- SA555C: CSA certified to C22.2 no. 42 (file no. 2081 (6221-02)).
- NOM Certified, except as noted.

MATERIAL CHARACTERISTICS

Polypropylene, PVC and Thermoplastic Rubber.
Environmental:
Meets flammability requirements per UL 94, VO rated except 224.
Temperature Rating:
-20°C to 60°C except 224:
-20°C to 70°C.

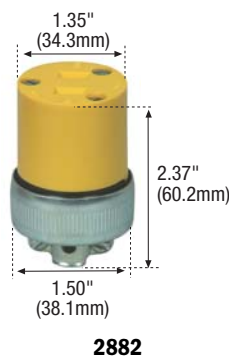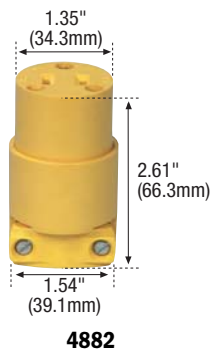

Commercial Grade Plugs and Connectors

FEATURES

- Solid brass plug blades are firmly embedded in body.
- Terminal screw clamps are designed to contain wire and prevent binding.
- Terminal screws backed out – ready for wiring.
- Terminals in individual chambers to positively insulate conductors.
- Vinyl angle plugs have eight possible positions for maximum convenience.
- Vinyl plugs and TPR rubber connectors resist chemical attack and stay flexible in extremely low temperatures.
- Armored housing automatically grounded.
- Combination slot/Phillips head mounting and terminal screws ease installation with power screwdrivers. (Slot/Robertson screws in Canada where available).

Vinyl Plugs and Connectors

Rating A	V/AC	NEMA	Description	Cord Diameter	Color	Catalog No.	
						Plug	Connector
15	125	1-15	Straight	0.25-0.655" (6.35-16.637mm)	Yellow	4862	4882*
			Angle	0.25-0.655" (6.35-16.637mm)	White	4862ANW*	-

*Not NOM

Vinyl Armored Plugs and Connectors

Rating A	V/AC	NEMA	Description	Cord Diameter	Color	Catalog No.	
						Plug	Connector
15	125	1-15	Straight	0.25-0.625" (6.35-15.87mm)	Yellow	2862	2882*

*Not NOM

Rubber Plugs and Connectors

Rating A	V/AC	NEMA	Description	Cord Diameter	Color	Catalog No.	
						Plug	Connector
15	125	1-15	Straight	0.25-0.60" (6.35-15.24mm)	Black	1723	224*
			Straight Polarized	0.25-0.60" (6.35-15.24mm)			

*Not NOM

