

CONNECTORS

Mechanical Connectors

Aluminum, Dual Rated, Splicer & Reducer
SR Series



FEATURES

- For splicing two copper or aluminum wires of equal or different sizes.
- Made of 6061T-6 aluminum alloy.
- Electro-tin plated for low contact resistance.

SPECIFICATIONS

- UL Listed for Wire Connector.
- UL486A/B Listed. AL9CU
- Temperature Rating: 90 °C.
- Voltage: 600V max. (2000V ma. per UL486B).


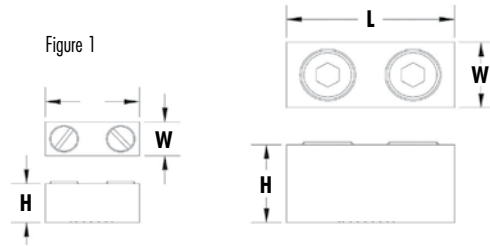


Figure 1

Figure 2



CAT. NO.	FIG. NO.	WIRE RANGE	MAX TORQUE VALUE (IN./LBS.)	HEX WRENCH SIZE (IN.)		LENGTH (L) (IN.)	WIDTH (W) (IN.)	HEIGHT (H) (IN.)	STD. CTN. QTY.
2SR	1	2-14 AWG	50	Slotted		1.594	0.443	0.550	50
1/0SR	1	1/0-14 AWG	120	Slotted		1.500	0.530	0.630	25
4/0SR	1	4/0-6 AWG	250	5/16		2.310	0.812	1.000	24
250SR	2	250 MCM-6 AWG	330	5/16		4.094	0.812	1.000	10
350SR	2	350 MCM-6 AWG	400	3/8		4.190	1.130	1.190	8
500SR	2	500 MCM-3/0 AWG	550	3/8		5.000	1.380	1.500	3
750SR	2	750-250 MCM	550	3/8		6.250	1.630	1.750	3