

Commercial Specification Grade Straight Blade Power Devices

2 Pole, 3 Wire Grounding
NEMA 5-50, 6-30
50A 125V, 30A 250V



INDUSTRIAL
COMMERCIAL
RESIDENTIAL

A-22 STRAIGHT BLADE RECEPTACLES

TESTING & CODE COMPLIANCE

- Listed to UL 498 & meets Federal Spec. WC-596 (file no. E2369) except as noted.
- Receptacles: (file no. E15058);
- Plugs: (file no. E15012).
- CSA Certified to C22.2 no. 42 (file no. LR7087);
- Plugs: (file no. 2081 (6221-02)),
- Receptacle: (file no. 6914 (6233-01)).
- NOM Certified

MATERIAL CHARACTERISTICS

Temperature Rating:
-20°C (without impact) to 75°C max. continuous.
5700N, V2 rated;
-40°C (without impact) to 105°C max. continuous.

Power Devices

FEATURES

- Heavy gauge steel mounting strap zinc-plated for corrosion resistance.
- Receptacles for use with copper or aluminum wire.
- Surface receptacles have patented lay-in terminals and accept up to #4 wire.
- Universal plugs include blades for 50A configurations.
- Surface receptacles 0.75" (19.05mm) and 1.0" (25.4mm) concentric knockouts and adjustable cord clamp allow for wiring from bottom or back.
- Flush receptacles fit one or two gang enclosures.
- High strength glass reinforced nylon body resists breakage in high abuse areas for Catalog No. 5700N.


NEMA 5-50 Rating 50A 125V

Receptacles

Description	Color	Catalog No.
Surface	Black	1251
Flush	Brown	1253

Plugs

Description	Color	Catalog No.
Angle Universal - Vinyl	Black	41

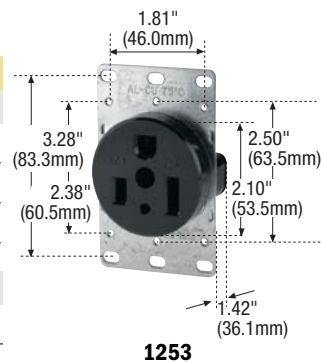

NEMA 6-30 Rating 30A 250V

Receptacles

Description	Color	Catalog No.
Surface	Black	1232
Flush	Black	5700N
Flush	Brown	1234
Flush with 1 Gang Brass Finish Wallplate	Brown	4234*

*Not NOM

Plugs

Description	Color	Catalog No.
Angle Universal - Vinyl	Black	42

