

Construction grade receptacles

Combines safe, rugged, reliable performance with ease-of-installation


Arrow Hart construction grade receptacles are designed to provide a dependable, long lasting user experience while increasing the speed and efficiency of installation

Construction grade 5262 & 5362 series features & benefits

Automatic grounding system eliminates need for bonding jumper in grounded metal enclosures

Nylon face resists high impact and chemical abuse

Patented screw catch captures wallplate screw eliminating hand threading of screw, lost screws and cross-threading

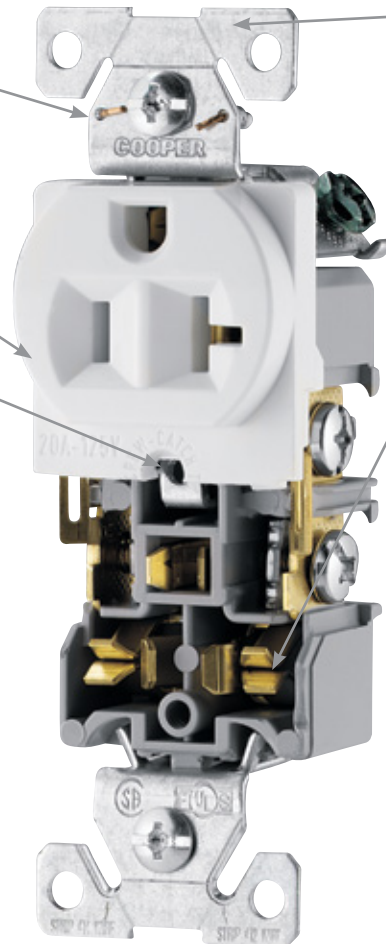

Extra long/wide mounting strap maintains assembly security and helps reach oversize cutouts

0.031" thick triple wipe brass line contacts minimize heat rise and maximize plug retention

Additional features & benefits

- Available in 15A & 20A duplex configurations, including tamper resistant and ArrowLink modular styles
- Convenient built-in #10 and #12 AWG wire strippers
- Tri-combo head terminal and mounting screws

Compliances, specifications and availability are subject to change without notice.

www.eaton.com
www.eaton.com/arrowhart

Straight blade power devices - 20, 30, 50 & 60A



Rating: Amps V/AC	Receptacle/ plug NEMA configuration	Flush receptacles	Wallplates	Surface receptacles	Panel mount receptacles	Plugs	Angle plugs	Connectors	Flanged inlets	Adapters
-------------------------	---	----------------------	------------	------------------------	----------------------------	-------	-------------	------------	-------------------	----------

2-pole, 3-wire grounding

30A 125V			Commercial: 1233 (Brown)	Standard size: 39CH, 68, 2068, 2168, 93221, 93227							Industrial: 5717N (Gray)	Commercial: S41 (Black)	Industrial: 6716N (Gray & Black)	Industrial: 5717NFI (Gray)				
	5-30R	5-30P	Industrial: 5716N (Black)												Industrial: 5717AN (Gray)			
30A 125V			Commercial: 1263 (Black)		Mid-size: 5068, PJ703, PJ724		Commercial: U1263 (Black)						Commercial: 83 (Black)		Commercial: 1264 (Receptacle to NEMA 5-15/5-20 plug) (Black)			
	TT-30R	TT-30P																
30A 250V			Commercial: 1234 (Black)			Mid-size: 5068, PJ703, PJ724		Commercial: 1232 (Black)					Industrial: 5701N (Gray)	Commercial: S42 (Black)	Industrial: 6700N (Gray & Black)	Industrial: 5701NFI (Gray)		
	6-30R	6-30P	Industrial: 5700N (Black)														Industrial: 5701AN (Gray)	
30A 277V			Industrial: 5795N (Black)				Mid-size: 5068, PJ703, PJ724							Industrial: 5703N (Gray)	Industrial: 5703AN (Gray)	Industrial: 6795N (Gray & Black)	Industrial: 5703NFI (Gray)	
	7-30R	7-30P																
50A 125V			Commercial: 1253 (Black)					Mid-size: 5068, PJ703, PJ724		Commercial: 1251 (Black)					Industrial: 5712N (Gray)	Commercial: S41 (Black)	Industrial: 6711N (Gray & Black)	Industrial: 5712NFI (Gray)
	5-50R	5-50P																
50A 250V			Commercial: 1254 (Black)	Mid-size: 5068, PJ703, PJ724						Commercial: 1252 (Black)					Industrial: 5710N (Gray)	Commercial: S42 (Black)	Industrial: 6709N (Gray & Black)	Industrial: 5710NFI (Gray)
	6-50R	6-50P	Industrial: 5709N (Black)															
50A 277V					Mid-size: 5068, PJ703, PJ724										Industrial: 5705N (Gray)	Industrial: 5705AN (Gray)	Industrial: 6796N (Gray & Black)	Industrial: 5705NFI (Gray)
	7-50R	7-50P																

3-pole, 3-wire non-grounding

20A 125/250V			Commercial: 805 (Ivory)								Industrial: 9151N (Gray)	Commercial: 2836 (Armed PVC) (Yellow)		
	10-20R	10-20P												
30A 125/250V dryer			Commercial: 38B (Brown)	Standard size: 39CH, 68, 2068, 2168, 93221, 93227		Commercial: 125 (Black)					Industrial: 9337N (Gray)	Commercial: S80 (Black)	Industrial: 9341N (Gray & Black)	Industrial: 9337NFI (Gray)
	10-30R	10-30P												
50A 125/250V range			Commercial: 32B (Brown)	Mid-size: 5068, PJ703, PJ724		Commercial: 112 (Black)					Industrial: 4524N (Gray)	Commercial: S80 (Black)	Industrial: 4526N (Gray & Black)	Industrial: 4524NFI (Gray)
	10-50R	10-50P	Industrial: 7985N (Black)											

Power device dimensional information: B-20; Specification information: B-25-B-27
Compliances, specifications and availability are subject to change without notice.

All products on this page are RoHS compliant - Page Q-32