

ILL. EM. STOP MUSHR. PUSHB., 22MM, ROUND, METAL, SHINY, RED, 40MM, POSITIVE LATCHING, ROTATE TO UNLATCH



Figure similar

|                     |                                  |
|---------------------|----------------------------------|
| product brand name  | SIRIUS ACT                       |
| Product designation | Commanding and signaling devices |

**Actuator:**

|   |                             |
|---|-----------------------------|
| Manner of function of the actuating element | Latching                    |
| Product expansion optional Light source     | Yes                         |
| Color                                       |                             |
| • of the actuating element                  | Red                         |
| Material of the actuating element           | plastic                     |
| Shape of the actuating element              | round                       |
| Outer diameter of the actuating element     | 40 mm                       |
| Type of unlocking device                    | rotate-to-unlatch mechanism |
| Number of switching positions               | 2                           |

**Front ring:**

|                              |    |
|------------------------------|----|
| Product component front ring | No |
|------------------------------|----|

**General technical data:**

|                          |     |
|--------------------------|-----|
| Product function         |     |
| • positive opening       | Yes |
| • EMERGENCY OFF function | Yes |

|  |                                   |
|--|-----------------------------------|
| • EMERGENCY STOP function                  | Yes                               |
| Protection class IP                        | IP66, IP67, IP69(IP69K)           |
| Degree of protection NEMA                  | NEMA 1, 2, 3, 3R, 4, 4X, 12       |
| Shock resistance                           |                                   |
| • acc. to IEC 60068-2-27                   | Sinusoidal half-wave 50 g / 11 ms |
| Vibration resistance                       |                                   |
| • acc. to IEC 60068-2-6                    | 10 ... 500 Hz: 5g                 |
| Operating frequency maximum                | 600 1/h                           |
| Mechanical service life (switching cycles) |                                   |
| • typical                                  | 300 000                           |
| Equipment marking                          |                                   |
| • acc. to DIN EN 61346-2                   | S                                 |
| • acc. to DIN EN 81346-2                   | S                                 |

#### Safety related data:

|  |         |
|--|---------|
| B10 value with high demand rate acc. to SN 31920 | 100 000 |
|--|---------|

#### Ambient conditions:

|   |                    |
|---|--------------------|
| Ambient temperature                                       |                    |
| • during operation  | -25 ... +70 °C     |
| • during storage  | -40 ... +80 °C     |
| Environmental category during operation acc. to IEC 60721 | 3K6, 3C3, 3S2, 3M6 |

#### Installation/ mounting/ dimensions:

|                                   |         |
|-----------------------------------|---------|
| Shape of the installation opening | round   |
| Mounting diameter                 | 22 mm   |
| Mounting height                   | 45.3 mm |
| Installation width                | 40 mm   |
| Installation depth                | 26.3 mm |

#### Certificates/ approvals:

other

[Bestätigungen](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)


<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU10511HB200AA0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU10511HB200AA0>



last modified:

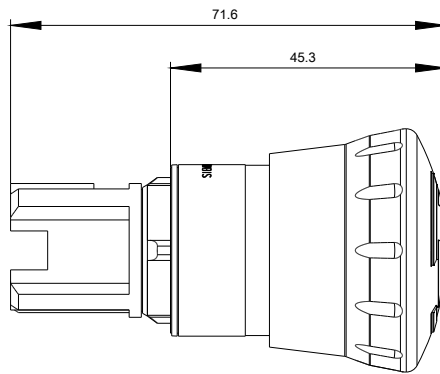

14.09.2015