


GFCIs

Weather-Resistant Self-Test GFCI Receptacles with SafeLock™ Protection

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

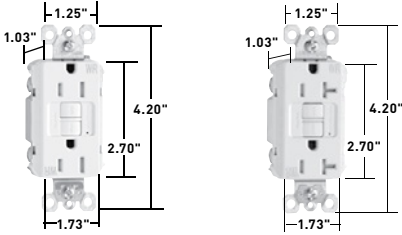

1597TRWRW

2097TRWRW


Features

- Weather-Resistant: Meets National Electrical Code® Weather-Resistant requirements.
- Tamper-Resistant: Meets National Electrical Code® Tamper-Resistant requirements.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Listed to the Weather-Resistant supplement of UL498 meeting demanding UL requirements including:
 - Ultraviolet light exposure test
 - Cold impact test
 - Accelerated aging test
 - Stringent material requirements for current carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Thinner than competitors' GFCI Receptacles: leaves more room for wires in the box.
- Auto-Ground clip assures a positive ground to metal box.
- Meets 2015 UL requirements.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED)
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 10kA short circuit rating.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long nickel post-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trio Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

| CATALOG NUMBER | RATING | | COLOR | NEMA CONFIG. NO. | 3rd PARTY COMPLIANCE | | |
|---|--------|-----|--------------|------------------|----------------------|--------------------|------------|
| | A. | VAC | | | UL943 C22.2 No. 144 | UL498 C22.2 No. 42 | FSUL WC596 |
| TRADEMASTER®/SPEC GRADE WEATHER-RESISTANT 15 AMP DUPLEX GFCI | | | | | | | |
| 1597TRWRI | 15 | 125 | Ivory | 5-15R | • | • | • |
| 1597TRWRW | 15 | 125 | White | 5-15R | • | • | • |
| 1597TRWR | 15 | 125 | Brown | 5-15R | • | • | • |
| 1597TRWRGRY | 15 | 125 | Gray | 5-15R | • | • | • |
| 1597TRWRBK | 15 | 125 | Black | 5-15R | • | • | • |
| 1597TRWRLA | 15 | 125 | Light Almond | 5-15R | • | • | • |
| SPECIFICATION GRADE WEATHER-RESISTANT 20 AMP DUPLEX GFCI | | | | | | | |
| 2097TRWRI | 20 | 125 | Ivory | 5-20R | • | • | • |
| 2097TRWRW | 20 | 125 | White | 5-20R | • | • | • |
| 2097TRWR | 20 | 125 | Brown | 5-20R | • | • | • |
| 2097TRWRGRY | 20 | 125 | Gray | 5-20R | • | • | • |
| 2097TRWRBK | 20 | 125 | Black | 5-20R | • | • | • |
| 2097TRWRLA | 20 | 125 | Light Almond | 5-20R | • | • | • |



National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.

Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.


DEVICES & WALL PLATES

Color Selection Chart

Devices & Plastic Wall Plate Colors



Ivory Light Almond White Green Antique Brass Dark Bronze Nickel

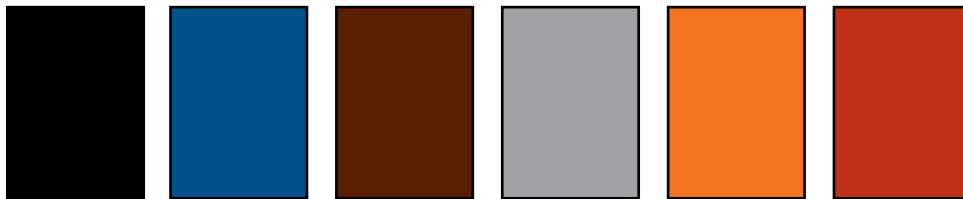

Black Blue Brown Gray Orange Red

See specific device and wall plate catalog charts for particular color availabilities.

Metal Wall Plates


Metal Finish



Aluminum Brass (Brushed) Polished Brass Stainless Steel Brushed Bronze Chrome

Custom Metal Wall Plates Paint Finish Colors

Paint Color

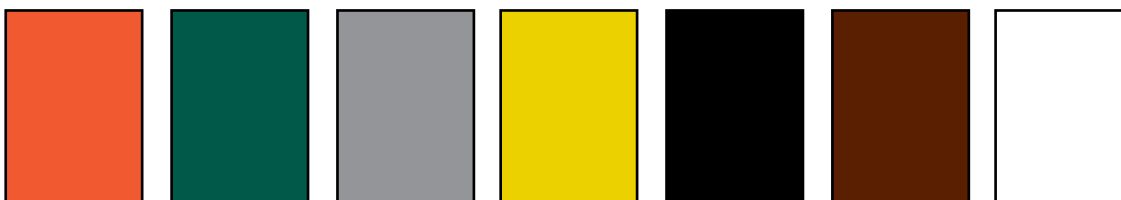

Orange Green Gray Yellow Glossy Black Brown White



Primer Red Pink Flat Black Ivory Light Almond Blue

To order custom metal wall plates, see Pages P-40 – P-42.
For additional colors consult factory.