


# PowerlMark Gold™ Load Centers

Single Phase , 40-125A, 2-8 circuits

- Sturdy copper bus and galvanized box increase durability and reliability
- Reduces total cost through faster, easier installation; enhanced application flexibility; and reduced inventory requirements
- Solid neutrals allow quick, easy, secure terminations
- Easy main breaker installation on 6 and 8 circuit interiors (use retainer clip)

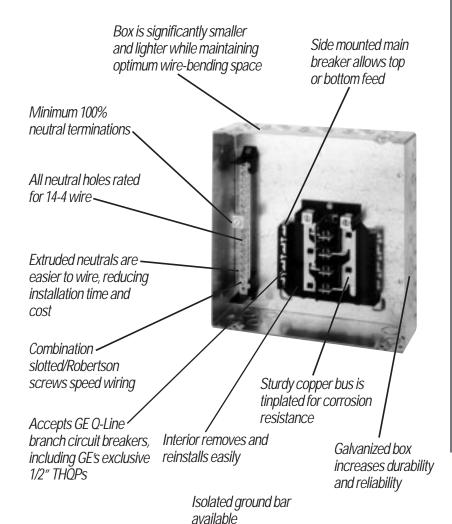

# PowerMark Gold™ Load Center Selection Guide


#### Factory Installed Main Lugs - Field Convertible to Main Circuit Breaker (125A only, please order main breaker separately)\*


Main	Max	ximum	Space	S	Total	Indoo	r Flush	Indoor Su	rface	Outdoor	Main	Equipment	Main Bkr	
Ampere	1" THQL 1/2" THQP		1-pole	Enclosure		Enclosure		Surface	Wire	Ground	Retainer	Dimensions:		
Rating	1p	2p	1p	2p	Spaces	with door	without door	with door	without door	Mount	Size	Kit	Kit	(WxHxD)
40	2	1	4	1	4	_	-	1	TL240SCU	TL240RCU	6-3	TGK4	-	Indoor: 5¾"x9¾"x3¼"
70	2	1	4	1	4	_	-	_	TL270SCU	TL270RCU	6-3	TGK4	_	Outdoor: 7%"x10"x3%"
125	6	3	12	4	12	TLM612FCUD	TLM612FCU	TLM612SCUD	TLM612SCU	TLM612RCU	6-1	TGK12	THQLRK2	4410 4410 010
125	8	4	16	6	16	TLM812FCUD	TLM812FCU	TLM812CUD	TLM812SCU	TLM812RCU	6-1	TGK12	THQLRK2	11¼″x11¼″x3¼″


<sup>\*</sup> Suitable main breakers include THQL and THHQL at 100A or less


#### Wiring Diagrams













	rminal	PowerMark Gold Wire					
S	ymbol	Range (AWG	S/kcmil) AL				
	F	6-1	6-1				
	G	6-3	6-3				

### **Knockout Configurations and Dimensions**




TLM612RCU TLM812RCU



TLM612FCU TLM812FCU TLM612FCUD TLM812FCUD T TLM612SCU T TLM812SCU

TLM612SCUD TLM812SCUD



TL240SCU TL270SCU

Symbol A • D G H J	K
9/32	-
- 3/8	-
Conduit - 1/2 1/2 1/2 1/2 -	T -
Size (In.) 3/4 3/4 3/4 3/4	3/4
1 1 1	1
11/4 11/4	4 1 1/4
	1 1/2

#### References

DET-222 Residential Products Catalog

For more information, contact your local GE ED&C sales office or visit us on the web at www.ge.com/edc/components

## Accessories & Options

- Door and handle
- Equipment ground kits (TGK12, TGK4)
- Front filler plates
- Handle locks
- Handle ties
- Hardware kits (THDWRKIT)
- Main breaker retainer kit (THQLRK2)
- · Universal raintight hubs



GE Industrial Systems