




# H93400X

## Arc Flash Full Body Harness

### FEATURES

- Meets requirements of ASTM F887
- 1¾ inch Kevlar® Webbing
- Dielectric Hardware
- SIGMA™ flame resistant (FR) Backpad and protective label cover
- Built in Relief Straps assist user to reach a gravity override seated position after a fall arrest

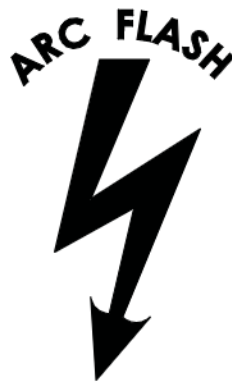

### SPECIFICATIONS

| Model No. | Size         | D-Rings   | D-Ring Material | Chest Connection | Leg Connection | Capacity         | Approx. Weight   | Compliance Standards                    |
|-----------|--------------|-----------|-----------------|------------------|----------------|------------------|------------------|---|
| H934001   | Small        | Back; Hip | Dielectric      | Pass-Thru        | Pass-Thru      | 400 lbs (181 kg) | 4.4 lbs (2.0 kg) | ANSI Z359.11<br>OSHA 29 CFR 1910 & 1926 |
| H934002   | Medium/Large | Back; Hip | Dielectric      | Pass-Thru        | Pass-Thru      | 400 lbs (181 kg) | 4.5 lbs (2.0 kg) | ANSI Z359.11<br>OSHA 29 CFR 1910 & 1926 |
| H934004   | X-Large      | Back; Hip | Dielectric      | Pass-Thru        | Pass-Thru      | 400 lbs (181 kg) | 4.5 lbs (2.1 kg) | ANSI Z359.11<br>OSHA 29 CFR 1910 & 1926 |
| H934005   | XX-Large     | Back; Hip | Dielectric      | Pass-Thru        | Pass-Thru      | 400 lbs (181 kg) | 4.6 lbs (2.1 kg) | ANSI Z359.11<br>OSHA 29 CFR 1910 & 1926 |

**⚠ WARNING:** Compliant fall protection equipment must only be used as it was designed. Users MUST read and understand all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.30 and 1926.503, or local safety regulations. Misuse or failure to follow these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

# Technical Data Sheet